



Profession • Integrity • Innovation



Professional Access Control Product Manufacturer

Excellent quality Enjoy safe

CE FC RoHS



Smart Vians Security Systems Trading LLC

Tel: +971 4 2206464

E- mail: sales@smartvians.com

Web: www.smartvians.com

Add: Business Central Tower, Tower B, Office 2108, Al Sufouh, Dubai, UAE

LinkedIn: <https://www.linkedin.com/company/smart-vians-security-systems>

SMART VIANS SECURITY SYSTEMS TRADING LLC

Note: For detailed specification and functions, please refer to User Manual; in case of inconsistency, the content in User Manual should be kept. All data and info in the catalog are carefully checked, any mistake resulted from printing and translation can be disregarded. Vians reserves the authority of explanation for its products.

About Us >>>

COMPANY PROFILE

Smart Vians Security Systems is a Joint Venture company formed from a strategic partnership between Shenzhen VIANS Technology Co., Ltd. (Vians Technology) and SmartWorld Computer Trading LLC (SmartWorld NextGen), to leverage the combined strengths and expertise of both companies.

Vians Technology is a leading manufacturer of electric lock equipment and offer OEM and ODM services globally since 2007. Backed by a strong R&D and production capacity, the focus is on development and production of access control products, including SMART access control Series products, smart door locks, electronic locks, automatic door openers and other access control products that have passed UL/CE/FCC/ROHS/MA and other testing certifications, in line with international general standards and security needs.

SmartWorld Nextgen is a leading provider of products and solutions, catering to diverse range of market verticals across the GCC and African region. SmartWorld NextGen has been operating for 2 decades offering valued added expertise and extensive distribution channel for Identity and Access Management , Physical Security, Access Control, Payment Solutions, Robotics and AI, Interactive Displays etc.

Our mission is to deliver top-tier security systems and equipment that enhance safety and peace of mind, through innovative solutions and exceptional customer service and become the premier supplier of access control hardware and accessories in the the Middle East. By providing top-quality products and services, the division aims to offer superior value to its customers, building long-term relationships with them.

CONTENTS/

1. Magnetic Lock Series	01
2. Electric Bolt Lock Series	09
3. Electric Strike Series	13
4. Door Closer Series	16
5. Electric Rim Lock Series	17
6. Push Bar Lock Series	19
7. Automatic Door Operator Serise	21
8. Power Supply Series	23
9. Exit Button Series	25
10. Door Loop Series	29
11. Card Series	31
12. RFID Card Reader Series	33
13. Access Control Series	35
14. Smart Lock Series	39
15. Lock Cylinder Series	49

SV-60A/AS


Single door magnetic lock



Parameter :

Model	SV-60A	SV-60AS
Holding force	60kg(120Lbs)	
Input voltage	DC12V	
Current	12V/160mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	0.5kg	
Suitable for	Cabinet/Wooden door / Glass door/Fireproof door	

Size(mm):

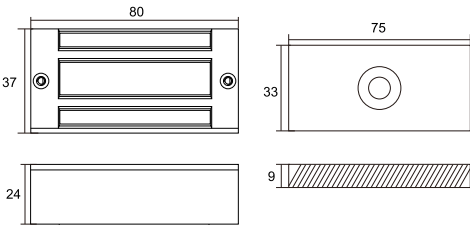

SV-280A/AS


Single door magnetic lock



Parameter :

Model	SV-280A	SV-280AS
Holding force	280kg(600Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/480mA; 24V240mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	2kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

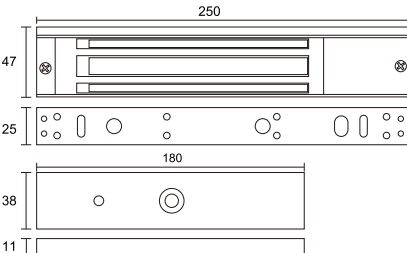

SV-70A/AS


Single door magnetic lock



Parameter :

Model	SV-70A	SV-70AS
Holding force	70kg(140Lbs)	
Input voltage	DC12V	
Current	12V/160mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	0.7kg	
Suitable for	Cabinet/Wooden door / Glass door/Fireproof door	

Size(mm):

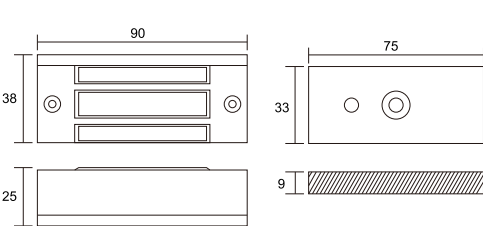

SV-280ADS/AST


Single door magnetic lock



Parameter :

Model	SV-280ADS	SV-280AST
Holding force	280kg(600Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/480mA; 24V240mA	
Lock signal	YES	YES
Door signal	YES	NO
Weight	2kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

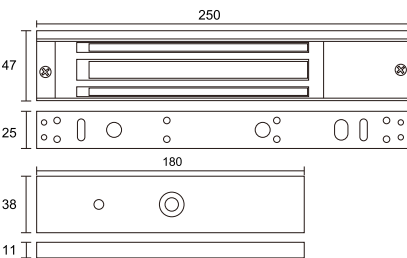

SV-180A/AS


Single door magnetic lock



Parameter :


Model	SV-180A	SV-180AS
Holding force	180kg(350Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/300mA;24V/150mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	1.2kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

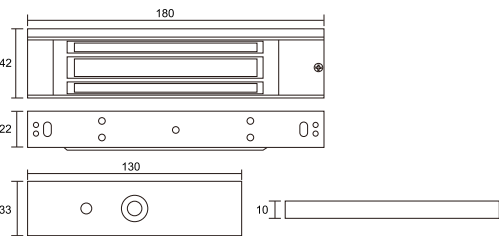

SV-280B/BS


Double door magnetic lock

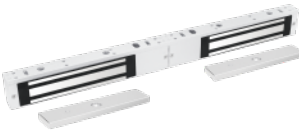

Parameter :

Model	SV-280B	SV-280BS
Holding force	280kg(600Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/480mA*2; 24V/240mA*2	
Lock signal	NO	YES
Door signal	NO	NO
Weight	4kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

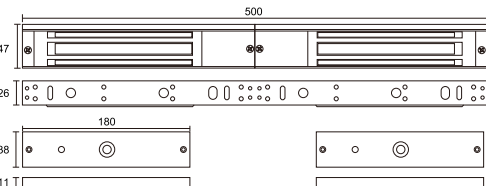

SV-180B/BS


Double door magnetic lock



Parameter :

Model	SV-180B	SV-180BS
Holding force	180kg(350Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/300mA*2; 24V/150mA*2	
Lock signal	NO	YES
Door signal	NO	NO
Weight	2.4kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

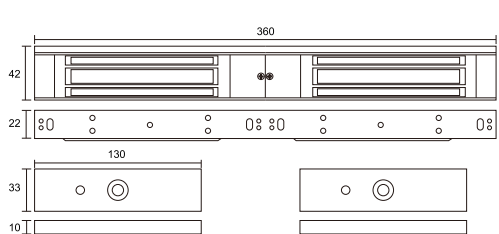

SV-280BDS/BST


Double door magnetic lock



Parameter :

Model	SV-280BDS	SV-280BST
Holding force	280kg(600Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/480mA*2; 24V/240mA*2	
Lock signal	YES	YES
Door signal	YES	NO
Weight	4kg	
Suitable for	Wooden door/Glass door Metal door/Fireproof door	

Size(mm):

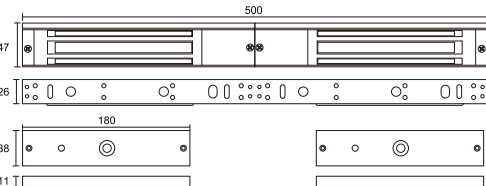

SV-350A/AS


Single door magnetic lock



Parameter :

Model	SV-350A	SV-350AS
Holding force	350kg(800Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/500mA; 24V/250mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	2.5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

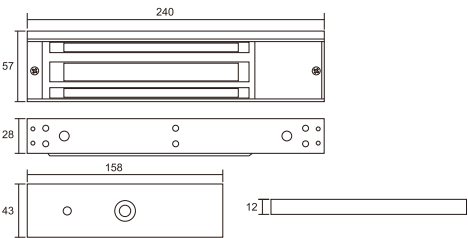

SV-500A/AS


Single door magnetic lock



Parameter :

Model	SV-350A	SV-350AS
Holding force	500kg(1200Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/600mA; 24V/300mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	4.5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

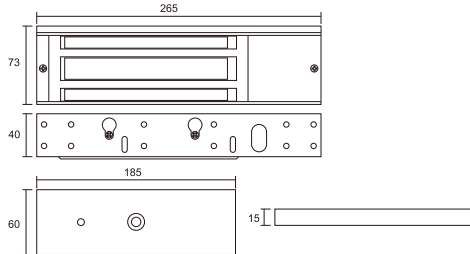

SV-350ADS/AST


Single door magnetic lock



Parameter :

Model	SV-350ADS	SV-350AST
Holding force	350kg(800Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/500mA; 24V/250mA	
Lock signal	YES	YES
Door signal	YES	NO
Weight	2.5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

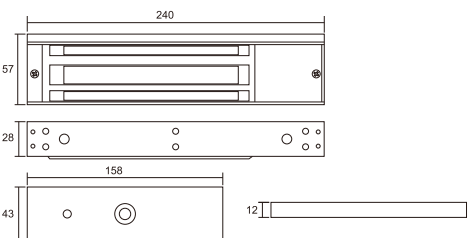

SV-500ADS/AST


Single door magnetic lock



Parameter :

Model	SV-350ADS	SV-350AST
Holding force	500kg(1200Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/600mA; 24V/300mA	
Lock signal	YES	YES
Door signal	YES	NO
Weight	4.5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

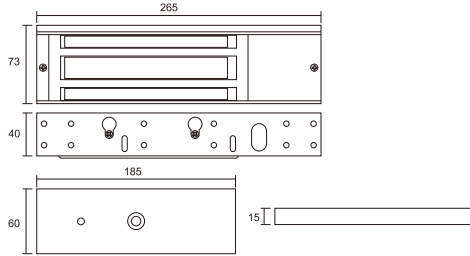

SV-350B/BS


Double door magnetic lock



Parameter :

Model	SV-350B	SV-350BS
Holding force	350kg(800Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/500mA*2; 24V/250mA*2	
Lock signal	NO	YES
Door signal	NO	NO
Weight	5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

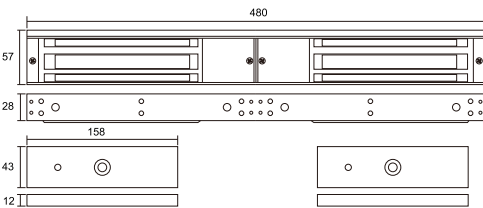

SV-500B/BS


Double door magnetic lock



Parameter :

Model	SV-350B	SV-350BS
Holding force	500kg(1200Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/600mA*2; 24V/300mA*2	
Lock signal	NO	YES
Door signal	NO	NO
Weight	9kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

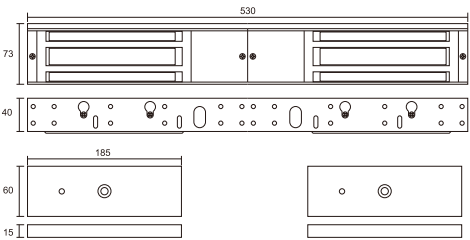

SV-350BDS/BST


Double door magnetic lock



Parameter :

Model	SV-350BDS	SV-350BST
Holding force	350kg(800Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/500mA*2; 24V/250mA*2	
Lock signal	YES	YES
Door signal	YES	NO
Weight	5kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

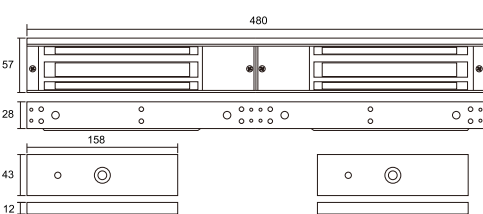

SV-500BDS/BST


Double door magnetic lock



Parameter :

Model	SV-350BDS	SV-350BST
Holding force	500kg(1200Lbs)*2	
Input voltage	DC12V or DC24V	
Current	12V/600mA*2; 24V/300mA*2	
Lock signal	YES	YES
Door signal	YES	NO
Weight	9kg	
Suitable for	Wooden door/Glass door/ Metal door/Fireproof door	

Size(mm):

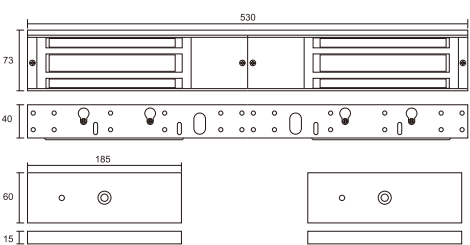

SV-180EA/ES


Single door magnetic lock with Mortise Mount



Parameter :

Model	SV-180EA	SV-180ES
Holding force	180kg(350Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/400mA; 24V/200mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	1.2kg	
Suitable for	Wooden door/Metal door/ Fireproof door	

Size(mm):

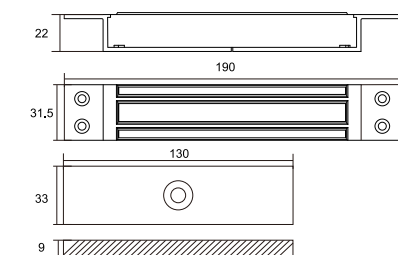

SV-280ASP


Single door magnetic lock (Waterproof)



Parameter :

Model	SV-280ASP
Holding force	280kg(600Lbs)
Input voltage	DC12V or DC24V
Current	12V/500mA; 24V/250mA
Lock signal	YES
Door signal	NO
Weight	2.7kg
Suitable for	Wooden door/Metal door/ Fireproof door

Size(mm):

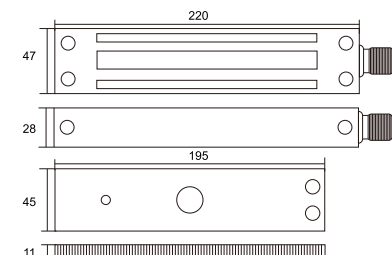

SV-280EA/ES


Single door magnetic lock with Mortise Mount



Parameter :

Model	SV-280EA	SV-280ES
Holding force	280kg(600Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/500mA; 24V/250mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	2kg	
Suitable for	Wooden door/Metal door/ Fireproof door	

Size(mm):

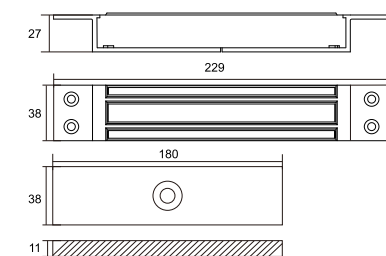

SV-280ASW


Single door magnetic lock (Waterproof)



Parameter :

Model	SV-280ASW
Holding force	280kg(600Lbs)
Input voltage	DC12V or DC24V
Current	12V/500mA; 24V/250mA
Lock signal	YES
Door signal	NO
Weight	2.3kg
Suitable for	Wooden door/Metal door/ Fireproof door

Size(mm):

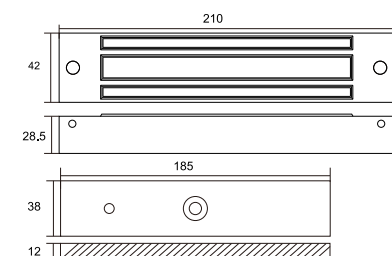

SV-350EA/ES


Single door magnetic lock with Mortise Mount



Parameter :

Model	SV-350EA	SV-350ES
Holding force	350kg(800Lbs)	
Input voltage	DC12V or DC24V	
Current	12V/480mA; 24V/240mA	
Lock signal	NO	YES
Door signal	NO	NO
Weight	2.7kg	
Suitable for	Wooden door/Metal door/ Fireproof door	

Size(mm):

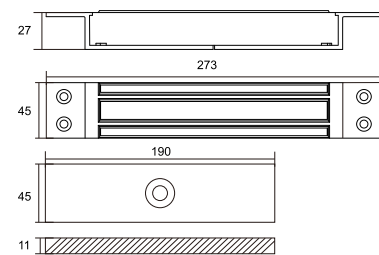

SV-500ASP


Single door magnetic lock (Waterproof)



Parameter :

Model	ML-500ASP
Holding force	500kg(1200Lbs)
Input voltage	DC12V or DC24V
Current	12V/500mA; 24V/250mA
Lock signal	YES
Door signal	NO
Weight	4.5kg
Suitable for	Wooden door/Metal door/ Fireproof door

Size(mm):

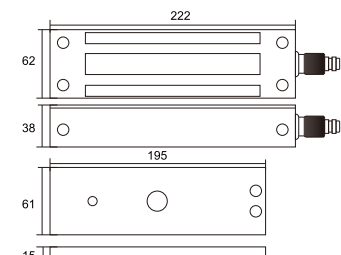

SV-1200A


Shear lock



Parameter :

Model	SV-1200A
Holding force	1200kg(2400Lbs)
Input voltage	DC12V or DC24V
Current	12V/220mA; 24V/190mA
Lock signal	YES
Door signal	NO
Weight	1kg
Suitable for	Wooden door/Metal door/ Fireproof door

Size(mm):

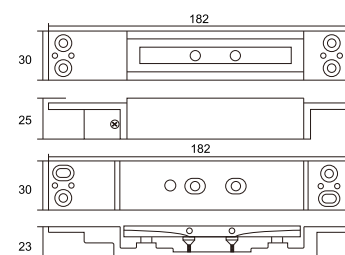

SV-500ASW


Single door magnetic lock (Waterproof)















Parameter :

Model	SV-500ASW
Holding force	500kg(1200Lbs)
Input voltage	DC12V or DC24V
Current	12V/500mA; 24V/250mA
Lock signal	YES
Door signal	NO
Weight	5kg
Suitable for	Wooden door/Metal door/ Fireproof door

Size(mm):

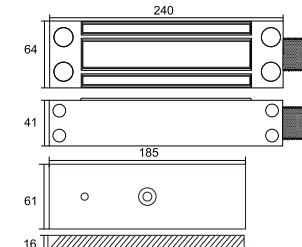

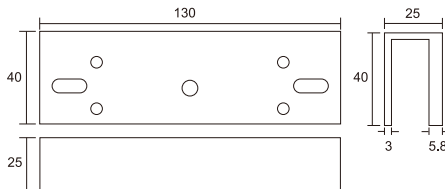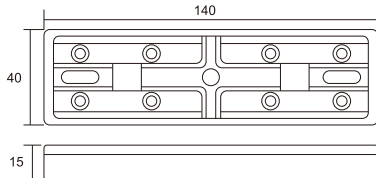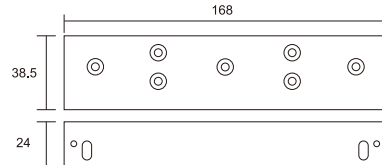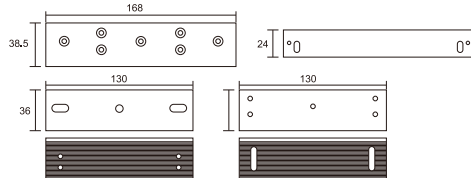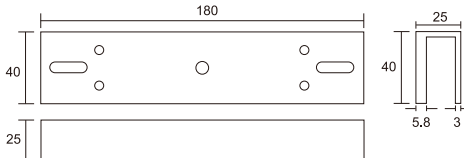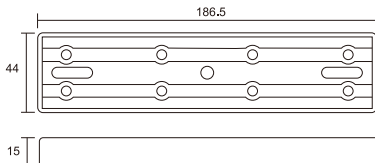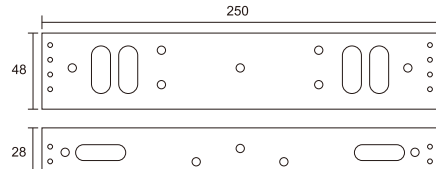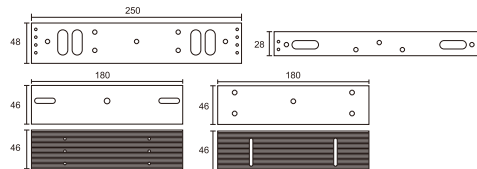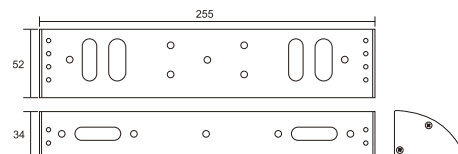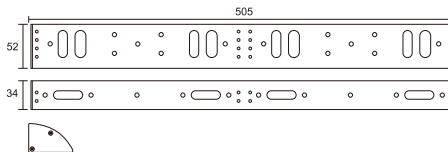SV-180U U Bracket 	Parameter : <table><tr><td>Model</td><td>SV-180U</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Glass thickness</td><td>8-15mm</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-180 Series</td></tr><tr><td>Weight</td><td>0.22kg</td></tr><tr><td>Suitable for</td><td>Glass door</td></tr></table>	Model	SV-180U	Material	High Strength Aluminum Alloy	Glass thickness	8-15mm	Opening mode	90 degree door	Used for	SV-180 Series	Weight	0.22kg	Suitable for	Glass door	Size(mm): 
Model	SV-180U															
Material	High Strength Aluminum Alloy															
Glass thickness	8-15mm															
Opening mode	90 degree door															
Used for	SV-180 Series															
Weight	0.22kg															
Suitable for	Glass door															
SV-180I I Bracket 	Parameter : <table><tr><td>Model</td><td>SV-180I</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-180 Series</td></tr><tr><td>Weight</td><td>0.22kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-180I	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-180 Series	Weight	0.22kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-180I															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-180 Series															
Weight	0.22kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-180L L Bracket 	Parameter : <table><tr><td>Model</td><td>SV-180L</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-180 Series</td></tr><tr><td>Weight</td><td>0.14kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-180L	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-180 Series	Weight	0.14kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-180L															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-180 Series															
Weight	0.14kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-180ZL ZL Bracket 	Parameter : <table><tr><td>Model</td><td>SV-180ZL</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-180 Series</td></tr><tr><td>Weight</td><td>0.4kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-180ZL	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-180 Series	Weight	0.4kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-180ZL															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-180 Series															
Weight	0.4kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-280U U Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280U</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Glass thickness</td><td>8-15mm</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.3kg</td></tr><tr><td>Suitable for</td><td>Glass door</td></tr></table>	Model	SV-280U	Material	High Strength Aluminum Alloy	Glass thickness	8-15mm	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.3kg	Suitable for	Glass door	Size(mm): 
Model	SV-280U															
Material	High Strength Aluminum Alloy															
Glass thickness	8-15mm															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.3kg															
Suitable for	Glass door															
SV-280I I Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280I</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.33kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-280I	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.33kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-280I															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.33kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-280L L Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280L</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.25kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-280L	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.25kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-280L															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.25kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-280ZL ZL Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280ZL</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.75kg</td></tr><tr><td>Suitable for</td><td>Wooden /Metal /Fire doors, etc.</td></tr></table>	Model	SV-280ZL	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.75kg	Suitable for	Wooden /Metal /Fire doors, etc.	Size(mm): 		
Model	SV-280ZL															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.75kg															
Suitable for	Wooden /Metal /Fire doors, etc.															
SV-280LC LC Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280LC</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.40kg</td></tr><tr><td>Suitable for</td><td>Wooden /Narrow door, etc.</td></tr></table>	Model	SV-280LC	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.40kg	Suitable for	Wooden /Narrow door, etc.	Size(mm): 		
Model	SV-280LC															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.40kg															
Suitable for	Wooden /Narrow door, etc.															
SV-280BLC BLC Bracket 	Parameter : <table><tr><td>Model</td><td>SV-280BLC</td></tr><tr><td>Material</td><td>High Strength Aluminum Alloy</td></tr><tr><td>Opening mode</td><td>90 degree door</td></tr><tr><td>Used for</td><td>SV-280 Series</td></tr><tr><td>Weight</td><td>0.80kg</td></tr><tr><td>Suitable for</td><td>Wooden /Narrow door, etc.</td></tr></table>	Model	SV-280BLC	Material	High Strength Aluminum Alloy	Opening mode	90 degree door	Used for	SV-280 Series	Weight	0.80kg	Suitable for	Wooden /Narrow door, etc.	Size(mm): 		
Model	SV-280BLC															
Material	High Strength Aluminum Alloy															
Opening mode	90 degree door															
Used for	SV-280 Series															
Weight	0.80kg															
Suitable for	Wooden /Narrow door, etc.															

SV-280BL


BL Bracket



Parameter :

Model	SV-280BL
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	
Weight	0.54kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

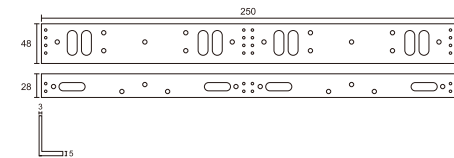

SV-280UI


UI Bracket



Parameter :

Model	SV-280UI
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-280 Series
Weight	0.32kg
Suitable for	Glass door

Size(mm):

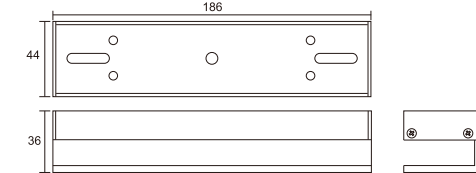

SV-350I


I Bracket



Parameter :

Model	SV-350I
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-350 Series
Weight	0.36kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

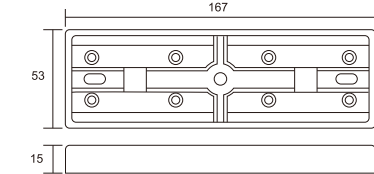

SV-350L


L Bracket



Parameter :

Model	SV-350L
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-350 Series
Weight	0.33kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

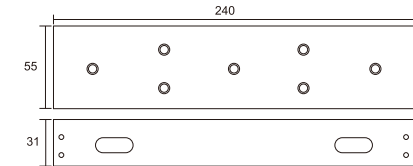

SV-350ZL


ZL Bracket



Parameter :


Model	SV-350ZL
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-350 Series
Weight	0.82kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

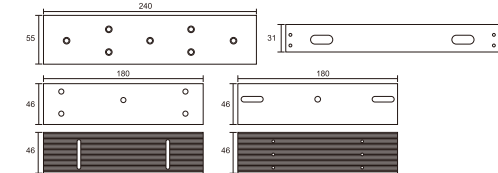

SV-500I


I Bracket



Parameter :

Model	SV-500I
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-500 Series
Weight	0.45kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

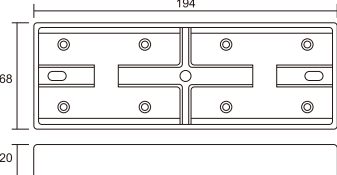

SV-500L


L Bracket



Parameter :

Model	SV-500L
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-500 Series
Weight	0.58kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

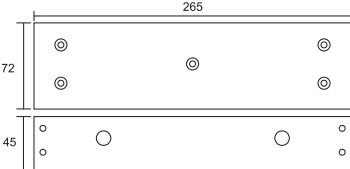

SV-500ZL


ZL Bracket



Parameter :

Model	SV-500ZL
Material	High Strength Aluminum Alloy
Opening mode	90 degree door
Used for	SV-500 Series
Weight	1.3kg
Suitable for	Wooden /Metal /Fire doors, etc.

Size(mm):

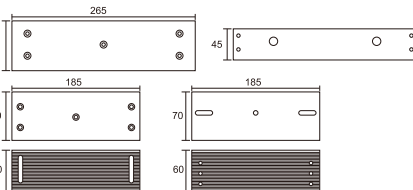

SV-52


Wall mount door holder



Parameter :

Model	SV-52
Holding force	50kg(110Lbs)
Voltage	24VDC±10%(12V Need order)
Current	24V/70mA 12V/140mA
Weight	0.9kg
Suitable for	Smoke proof doors
Optional	Press button to release the door

Size(mm):

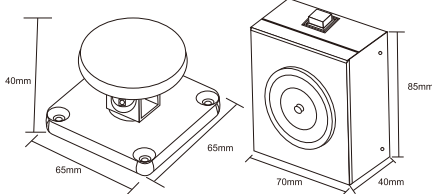

SV-53


Floor&Wall mount door holder



Parameter :

Model	SV-53
Holding force	50kg(110Lbs)
Voltage	24VDC±10%(12V Need order)
Current	24V/70mA 12V/140mA
Weight	1.4kg
Suitable for	Smoke proof doors
Optional	Press button to release the door

Size(mm):

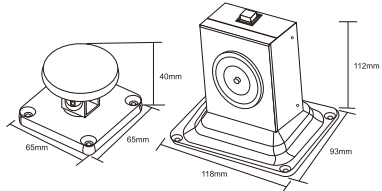


SV-801/801T

Electric bolt lock
(Low temperature type)



Parameter :

Model	SV-801	SV-801T
Security type	Power off unlock	
Input voltage	DC12V±10%	
Current	120mA	
Time delay	NO	YES
Door signal	NO	NO
Weight	0.72kg	
Suitable for	Wooden door, Glass door, Metal door, Fireproof door	

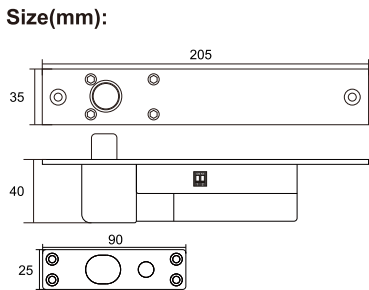


SV-807ST

Narrow panel Electric bolt lock(Long panel)



Parameter :

Model	SV-807ST
Security type	Power off unlock
Input voltage	DC12V±10%
Current	80mA
Time delay	YES
Door signal	YES
Weight	0.75kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

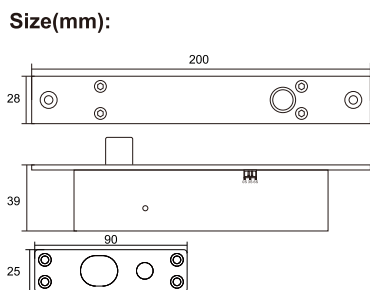


SV-802S/802ST

Electric bolt lock
(Low temperature type)



Parameter :

Model	SV-802S	SV-802ST
Security type	Power off unlock	
Input voltage	DC12V±10%	
Current	120mA	
Time delay	NO	YES
Door signal	YES	YES
Weight	0.72kg	
Suitable for	Wooden door, Glass door, Metal door, Fireproof door	

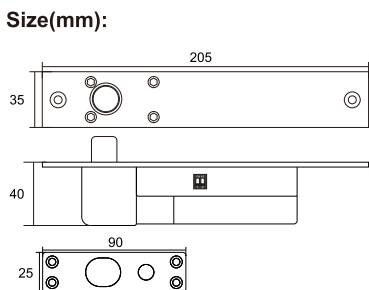


SV-808ST

Electric Bolt Lock(Fully Frameless Glass door)



Parameter :

Model	SV-808ST
Security type	Power off unlock
Input voltage	DC12V±10%
Current	80mA
Time delay	YES
Door signal	YES
Weight	0.86kg
Suitable for	10-12mm frameless glass door

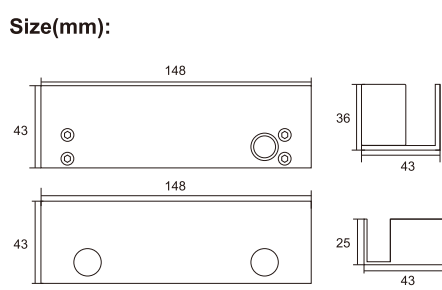


SV-803ST/805ST

Intelligent Electric bolt lock



Parameter :

Model	SV-803ST	SV-805ST
Security type	Power off unlock	
Input voltage	DC12V±10%	
Current	120mA	
Time delay	YES	YES
Door signal	YES	YES
Weight	0.72kg	
Suitable for	Wooden door, Glass door, Metal door, Fireproof door	

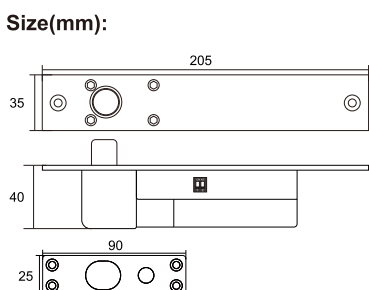


SV-809ST

Electric bolt lock(With key)



Parameter :

Model	SV-809ST
Security type	Power off unlock
Input voltage	DC12V±10%
Current	80mA
Time delay	YES
Door signal	YES
Weight	1.25kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

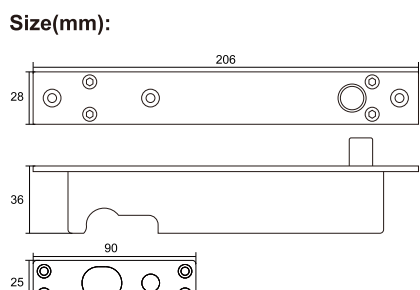


SV-806ST

Narrow panel Electric bolt lock(Short panel)



Parameter :

Model	SV-806ST
Security type	Power off unlock
Input voltage	DC12V±10%
Current	80mA
Time delay	YES
Door signal	YES
Weight	0.86kg
Suitable for	Narrow frame door

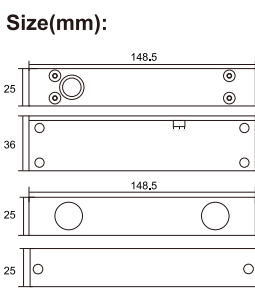


SV-810ST

Electric bolt lock(With key)



Parameter :

Model	SV-810ST
Security type	Power off unlock
Input voltage	DC12V±10%
Current	80mA
Time delay	YES
Door signal	YES
Weight	0.9kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

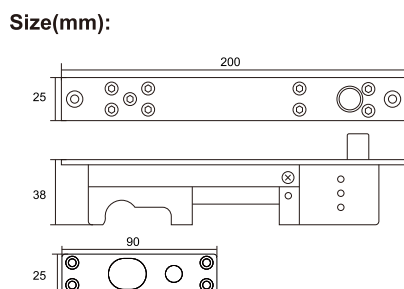


SV-812ST

Electric bolt lock




Parameter :

Model	SV-812ST
Security type	Power off unlock
Input voltage	DC12V/24V
Current	200mA
Time delay	YES
Door signal	YES
Weight	0.72kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

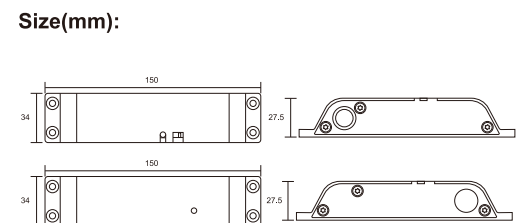


SV-817ST

Electric bolt lock

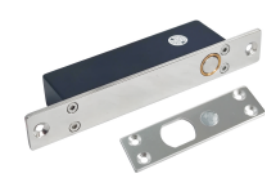

Parameter :

Model	SV-817ST
Security type	Power off unlock
Input voltage	DC12V
Current	150mA
Time delay	YES
Door signal	YES
Weight	0.72kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

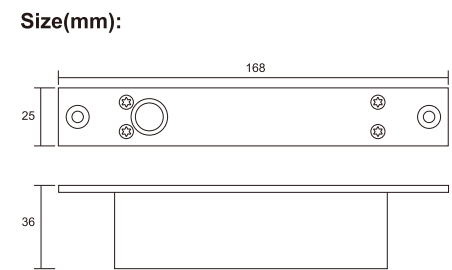


SV-813ST

Electric bolt lock



Parameter :

Model	SV-813ST
Security type	Power off unlock
Input voltage	DC12V
Current	150mA
Time delay	YES
Door signal	YES
Weight	0.72kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

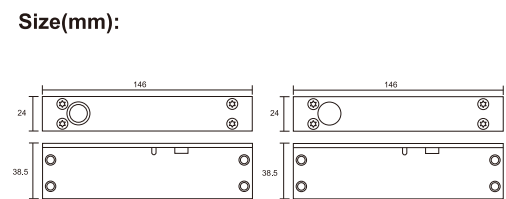


SV-820

Electric bolt lock



Parameter :

Model	SV-820
Security type	Power on and unlock
Input voltage	DC12V
Current	60mA
Starting current	1.05A
Signal output	NO
Weight	0.18kg
Suitable for	Cabinets, drawers, etc

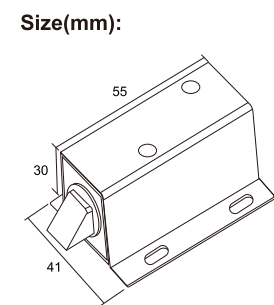


SV-815ST

Electric bolt lock



Parameter :

Model	SV-815ST
Security type	Power off unlock
Input voltage	DC12V
Current	150mA
Time delay	YES
Door signal	YES
Weight	0.72kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

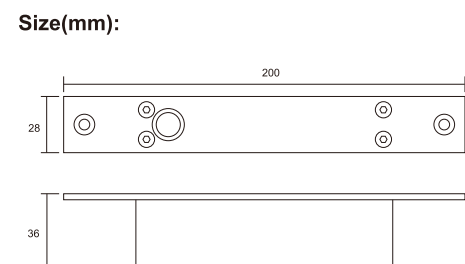


SV-800L

Electric bolt lock bracket



Parameter :

Model	SV-800L
Product name	Stainless steel glass door clip
Glass thickness	10-15mm
Opening mode	180 degree swing door
Material	304 stainless steel
Signal output	NO
Weight	0.3kg
Suitable for	Glass door

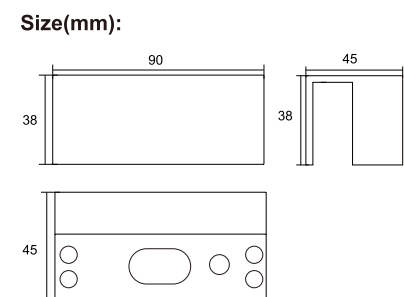


SV-816ST

Electric bolt lock



Parameter :

Model	SV-816ST
Security type	Power off unlock
Input voltage	DC12V
Current	150mA
Time delay	YES
Door signal	YES
Weight	0.72kg
Suitable for	Wooden door, Glass door, Metal door, Fireproof door

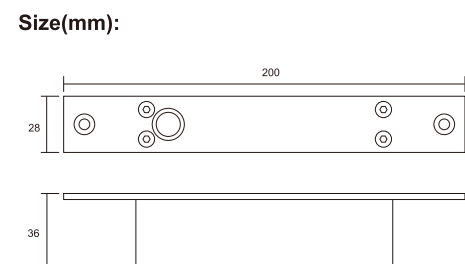


SV-800U

Electric bolt lock bracket




Parameter :

Model	SV-800U
Product name	Fully Frameless Glass Door
Glass thickness	10-15mm
Opening mode	180 degree swing door
Material	304 stainless steel
Signal output	NO
Weight	1.6kg
Suitable for	Glass door

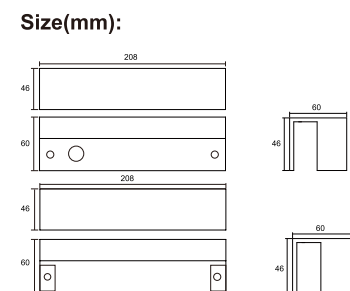

SV-700/700S


Standard-type electric strike

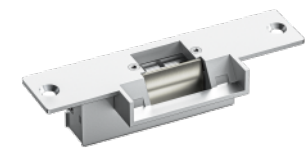

Parameter :

Model	SV-700	SV-700S
Lock structure	Stainless steel precision casting	
Holding stength	500KG	
Input voltage	DC12V±10%	
Current	200mA	
Door signal	NO	YES
Opening mode	90 Degree Swing Door	
Weight	0.3kg	
Suitable for	Wooden door, Metal door	

Size(mm):

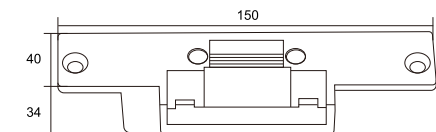

SV-703/703S


American Standard Electric Strike(Long panel)



Parameter :

Model	SV-703	SV-703S
Lock structure	Stainless steel precision casting	
Holding stength	500KG	
Input voltage	DC12V±10%	
Current	250mA	
Door signal	NO	YES
Opening mode	90 Degree Swing Door	
Weight	0.4kg	
Suitable for	Wooden door, Metal door	

Size(mm):

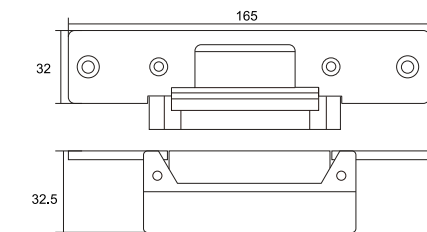

SV-701/701S


Short panel electric strike



Parameter :

Model	SV-701	SV-701S
Lock structure	Stainless steel precision casting	
Holding stength	500KG	
Input voltage	DC12V±10%	
Current	200mA	
Door signal	NO	YES
Opening mode	90 Degree Swing Door	
Weight	0.4kg	
Suitable for	Wooden door, Metal door	

Size(mm):

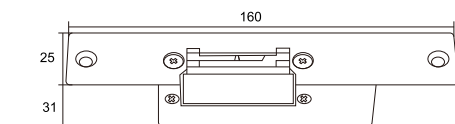

SV-703SD


American Standard Electric Strike(Long panel)



Parameter :


Model	SV-703SD
Lock structure	Stainless steel precision casting
Holding stength	500KG
Input voltage	DC12V±10%
Current	250mA
Door signal	YES
Opening mode	90 Degree Swing Door
Weight	0.4kg
Suitable for	Wooden door, Metal door

Size(mm):

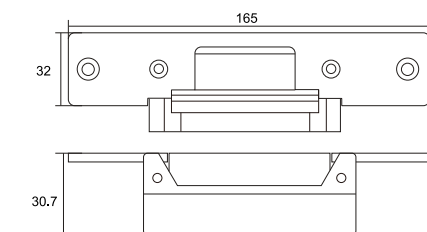

SV-702/702S


American Standard Electric Strike(Short panel)

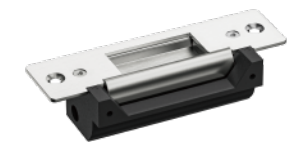

Parameter :

Model	SV-702	SV-702S
Lock structure	Stainless steel precision casting	
Holding stength	500KG	
Input voltage	DC12V±10%	
Current	320mA	
Door signal	NO	YES
Opening mode	90 Degree Swing Door	
Weight	0.35kg	
Suitable for	Wooden door, Metal door	

Size(mm):

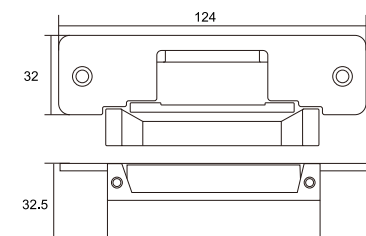

SV-704


Electric Strike(Long panel)



Parameter :

Model	SV-704
Lock structure	Stainless steel precision casting
Holding stength	500KG
Input voltage	DC12V±10%
Current	200mA
Door signal	YES
Opening mode	90 Degree Swing Door
Weight	0.4kg
Suitable for	Wooden door, Metal door

Size(mm):

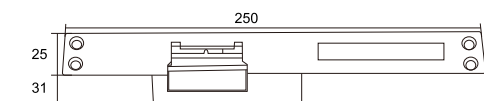

SV-702SD


American Standard Electric Strike(Short panel)



Parameter :

Model	SV-702SD
Lock structure	Stainless steel precision casting
Holding stength	500KG
Input voltage	DC12V or DC24V
Current	12V/300mA ; 24V/150mA
Door signal	YES
Opening mode	90 Degree Swing Door
Weight	0.4kg
Suitable for	Wooden door, Metal door

Size(mm):

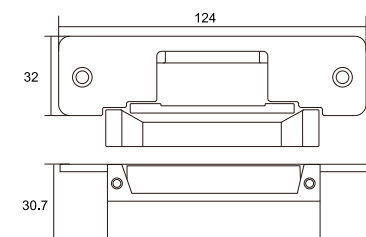

SV-705/705S


Long Type European Electric Strike



Parameter :

Model	SV-705	SV-705S
Lock structure	Stainless steel precision casting	
Holding stength	500KG	
Input voltage	DC12V±10%	
Current	200mA	
Door signal	NO	YES
Opening mode	90 Degree Swing Door	
Weight	0.42kg	
Suitable for	Wooden door, Metal door	

Size(mm):

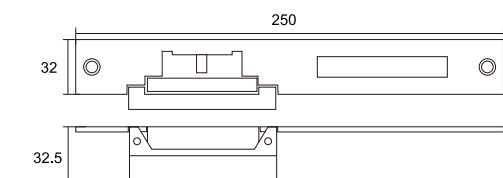

SV-705SD


Long Type European Electric Strike



Parameter :

Model	SV-705SD
Lock structure	Stainless steel precision casting
Holding strength	500KG
Input voltage	DC12V or DC24V
Current	12V/320mA; 24V160mA
Door signal	YES
Opening mode	90 Degree Swing Door
Weight	0.42kg
Suitable for	Wooden door, Metal door

Size(mm):

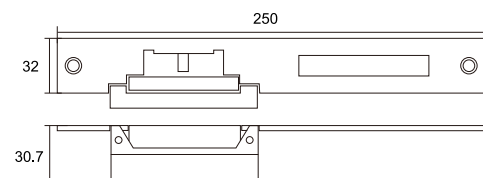

SV-706


European Narrow-type and Adjustable Electric Strike



Parameter :

Model	SV-706
Lock structure	Stainless steel precision casting
Holding strength	500KG
Input voltage	DC12V±10%
Current	200mA
Door signal	NO
Weight	0.42kg
Suitable for	Narrow frameWooden door/ Metal door

Size(mm):

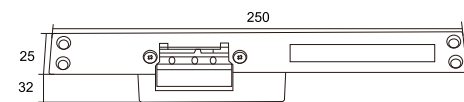

SV-707


European Narrow-type and Adjustable Electric Strike



Parameter :

Model	SV-707
Lock structure	Stainless steel precision casting
Holding strength	500KG
Input voltage	DC12V±10%
Current	200mA
Door signal	NO
Weight	0.3kg
Suitable for	Narrow frameWooden door/ Metal door

Size(mm):

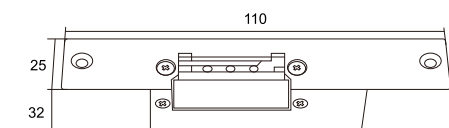

SV-708


Electric strike for glass door



Parameter :

Model	SV-708
Lock structure	Stainless steel precision casting
Holding strength	500KG
Input voltage	DC12V±10%
Current	200mA
Door signal	NO
Weight	0.3kg
Suitable for	Glass door

Size(mm):

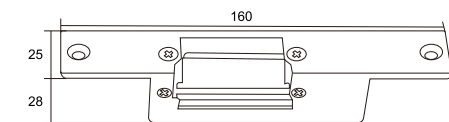

SV-S101


Door Closer



Parameter :

Model	SV-S101
Material	Aluminum alloy
Max Door Weight	20-40KG
Max Door Width	750mm
Spring power	EN1-2
Max opening angle	130°
Positioning function	NO
Constant speed function	NO
Colour	Silver/Black/Milky/Golden

Size(mm):

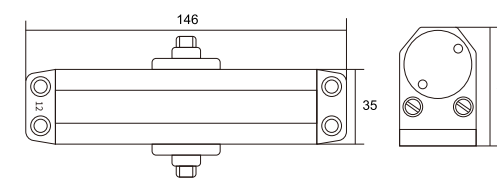

SV-S102


Door Closer



Parameter :

Model	SV-S102
Material	Aluminum alloy
Max Door Weight	40-60KG
Max Door Width	950mm
Spring power	EN2-3
Max opening angle	180°
Positioning function	YES
Constant speed function	YES
Colour	Silver/Black/Milky/Golden

Size(mm):

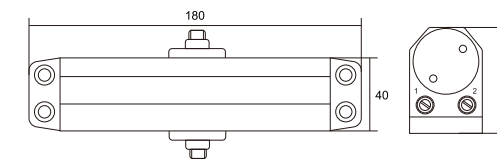

SV-S203


Door Closer



Parameter :

Model	SV-S203
Material	Aluminum alloy
Max Door Weight	60-80KG
Max Door Width	1100mm
Spring power	EN3-4
Max opening angle	180°
Positioning function	YES
Constant speed function	YES
Colour	Silver/Black/Milky/Golden

Size(mm):

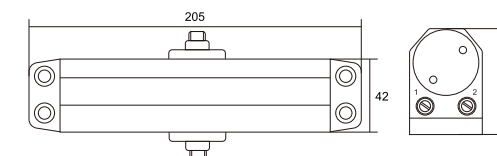

SV-S505


Door Closer



Parameter :

Model	SV-S505
Material	Aluminum alloy
Max Door Weight	40-100KG
Max Door Width	850-1250mm
Spring power	EN2-5
Max opening angle	180°
Positioning function	YES
Constant speed function	YES
Colour	Silver/Black/Milky/Golden

Size(mm):

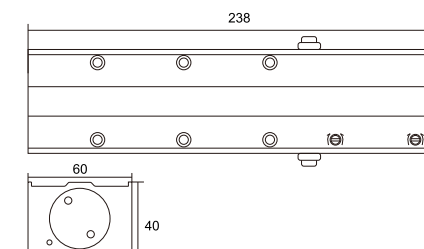


SV-600A

Electric rim lock



Parameter :	
Model	SV-600A
Cylinder	Single
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	85mA
Material	Nickel alloy
Tongue length	12mm
Suitable for	Wooden door, Metal door, Fireproof door

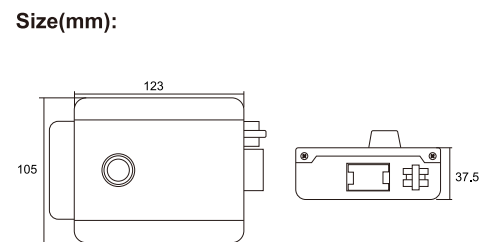


SV-602A

Electric motor lock



Parameter :	
Model	SV-602A
Cylinder	Single
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	20mA
Material	Nickel alloy
Tongue length	22mm
Suitable for	Wooden door, Metal door, Fireproof door

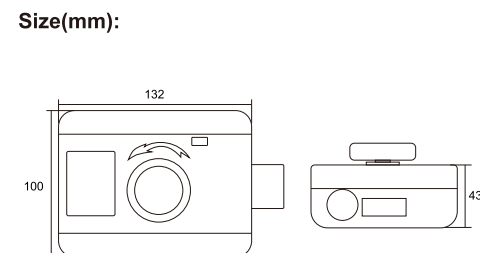


SV-600B

Electric rim lock



Parameter :	
Model	SV-600B
Cylinder	Double
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	85mA
Material	Nickel alloy
Tongue length	12mm
Suitable for	Wooden door, Metal door, Fireproof door

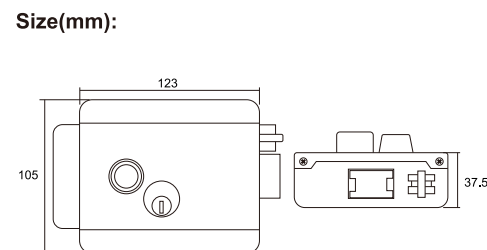


SV-602B

Electric motor lock



Parameter :	
Model	SV-602B
Cylinder	Double
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	20mA
Material	Nickel alloy
Tongue length	22mm
Suitable for	Wooden door, Metal door, Fireproof door

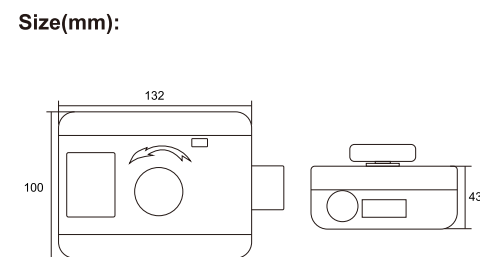


SV-601A

Electric motor lock



Parameter :	
Model	SV-601A
Cylinder	Single
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	20mA
Material	Nickel alloy
Tongue length	22mm
Suitable for	Wooden door, Metal door, Fireproof door

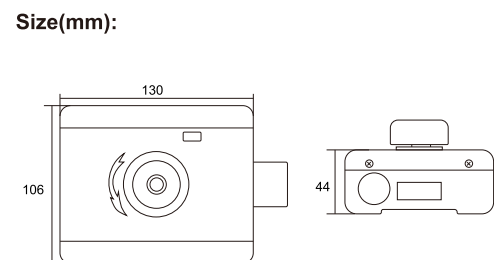


SV-603A

Electric rim lock



Parameter :	
Model	SV-603A
Cylinder	Single
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	85mA
Material	Nickel alloy
Tongue length	12mm
Suitable for	Wooden door, Metal door, Fireproof door

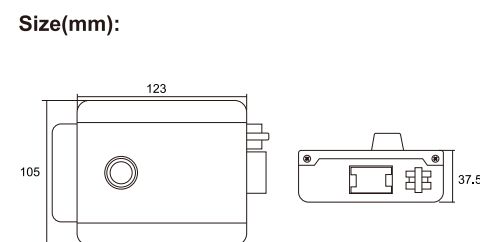


SV-601B

Electric motor lock



Parameter :	
Model	SV-601B
Cylinder	Double
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	20mA
Material	Nickel alloy
Tongue length	22mm
Suitable for	Wooden door, Metal door, Fireproof door

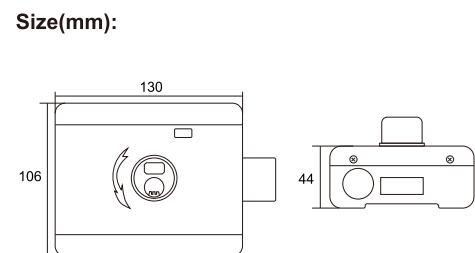


SV-603B

Electric rim lock




Parameter :	
Model	SV-603B
Cylinder	Double
Fail safe	Locked when energized
Input voltage	DC12V±10%
Current	85mA
Material	Nickel alloy
Tongue length	12mm
Suitable for	Wooden door, Metal door, Fireproof door

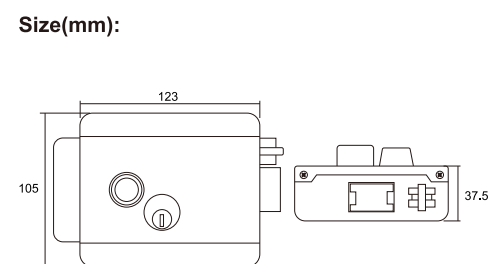

SV-916/916S


Push bar lock

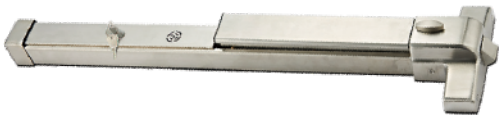

Parameter :

Model	SV-916	SV-916S
Material	SUS304 stainless steel	
Fire resistance limit	(960 C ,min)>72	
Service life	> 300000 (times)	
Push bar thrust	<70 (N)	
External tensile force	≥1300(N)	
Internal thrust force	≥1300(N)	
Locking tongue closing force	<20 (N)	
Alarm function	NO	YES

Size(mm):

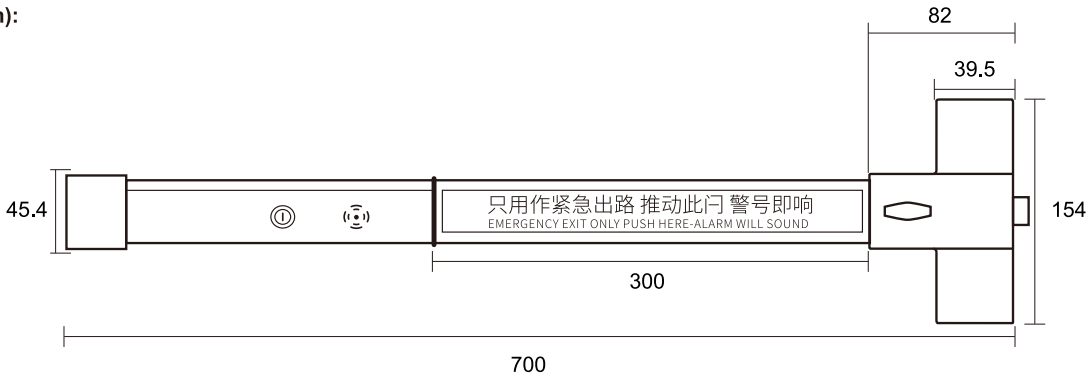

SV-918/918S


Push bar lock



Parameter :

Model	SV-918	SV-918S
Material	Iron baking paint	
Fire resistance limit	(960 C ,min)>72	
Service life	> 300000 (times)	
Push bar thrust	<70 (N)	
External tensile force	≥1300(N)	
Internal thrust force	≥1300(N)	
Locking tongue closing force	<20 (N)	
Alarm function	NO	YES

Size(mm):

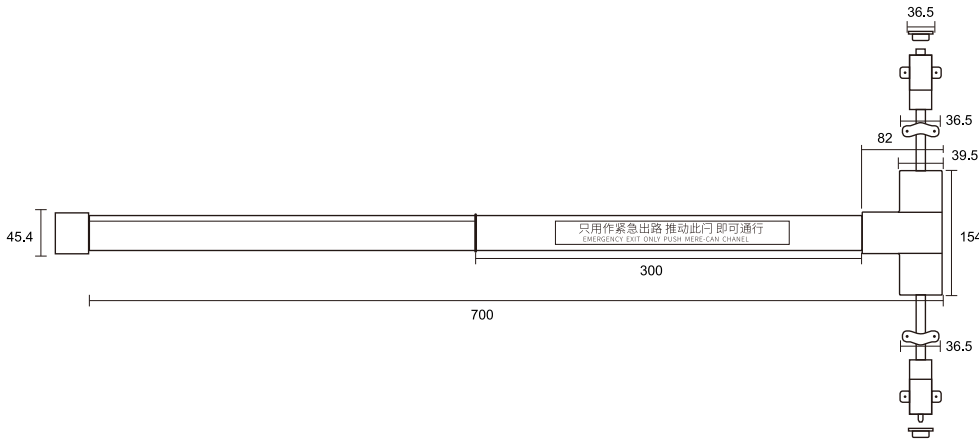

SV-917/917S


Push bar lock



Parameter :


Model	SV-917	SV-917S
Material	SUS304 stainless steel	
Fire resistance limit	(960 C ,min)>72	
Service life	> 300000 (times)	
Push bar thrust	<70 (N)	
External tensile force	≥1300(N)	
Internal thrust force	≥1300(N)	
Locking tongue closing force	<20 (N)	
Alarm function	NO	YES

Size(mm):

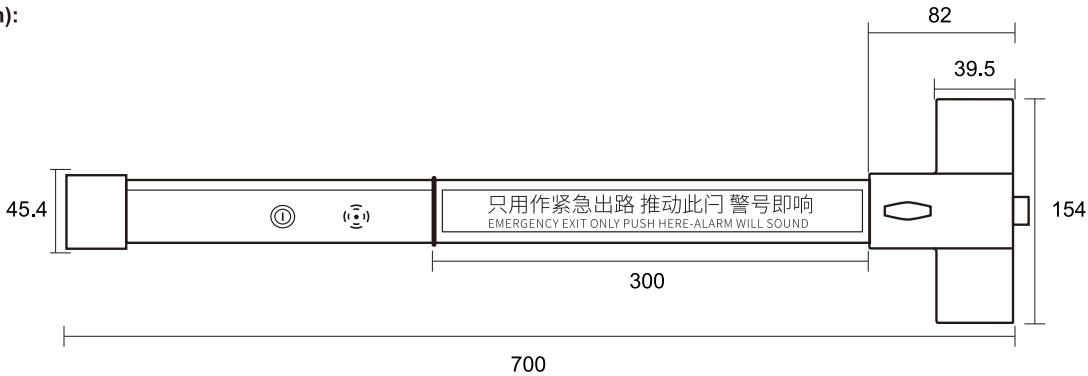

SV-919/919S


Push bar lock

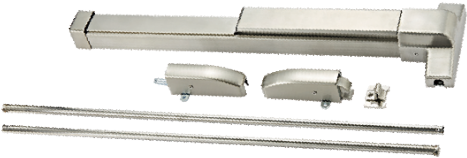

Parameter :

Model	SV-919	SV-919S
Material	Iron baking paint	
Fire resistance limit	(960 C ,min)>72	
Service life	> 300000 (times)	
Push bar thrust	<70 (N)	
External tensile force	≥1300(N)	
Internal thrust force	≥1300(N)	
Locking tongue closing force	<20 (N)	
Alarm function	NO	YES

Size(mm):

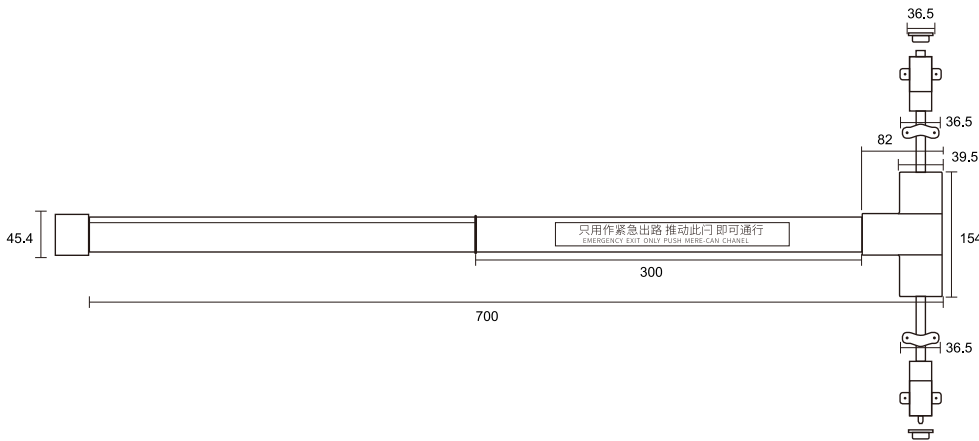

SV-PM70

Automatic door operator



Parameter :

Model	SV-PM70
Motor voltage	36V DC brushless motor
Maximum torque	30Nm
Maximum gate width	900mm
Maximum gate weight	90kg
Wheelbase	258mm
Application environment	Indoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Service life	≥200,000 times
Unit size	516x80x95mm
Weight	6.5kg

SV-PW240

Automatic door operator



Parameter :

Model	SV-PW240
Motor voltage	36V DC brushless motor
Maximum torque	110Nm
Maximum gate width	1200mm
Maximum gate weight	200kg
Wheelbase	82mm
Application environment	Indoor/outdoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Service life	≥200,000 times
Unit size	330x80x122mm
Weight	10kg

SV-PM80A

Automatic door operator



Parameter :

Model	SV-PM80A
Motor voltage	36V DC brushless motor
Maximum torque	40Nm
Maximum gate width	900mm
Maximum gate weight	100kg
Wheelbase	288mm
Application environment	Indoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Service life	≥200,000 times
Unit size	572x80x95mm
Weight	10kg

SV-PD180

Automatic door operator



Parameter :

Model	SV-PD180
Motor voltage	36V DC brushless motor
Maximum torque	70Nm
Maximum gate width	1200mm
Maximum gate weight	150kg
Wheelbase	75mm
Application environment	Indoor/outdoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Panel size	309x146x2mm
Unit size	296x132x80mm
Weight	6.5kg

SV-PW180

Automatic door operator



Parameter :

Model	SV-PW180
Motor voltage	24V DC brushless motor
Maximum torque	60Nm
Maximum gate width	1100mm
Maximum gate weight	150kg
Wheelbase	82mm
Application environment	Indoor/outdoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Service life	≥200,000 times
Unit size	330x80x122mm
Weight	9kg

SV-PD240

Automatic door operator



Parameter :

Model	SV-PD240
Motor voltage	36V DC brushless motor
Maximum torque	110Nm
Maximum gate width	1500mm
Maximum gate weight	200kg
Wheelbase	110mm
Application environment	Indoor/outdoor
Enable direction	Unidirectional enable
Maximum power	45W
Opening speed	3-8s
Opening time	1-30s
Panel size	376×203×2mm
Unit size	358x184x108mm
Weight	11.5kg

SV-PS01/02


Switching power supply



Parameter :

Model	SV-PS01	SV-PS02
Input voltage	AC220V±20%;AC110V±20%	
Output voltage	DC12V±15%	
Working ripple	≤100mV	
Output current	3A	5A
Standard battery	12V/7Ah	
Weight	0.35kg	
Material	Aluminium alloy	
Suitable for	Access control, electric lock	

Size(mm):

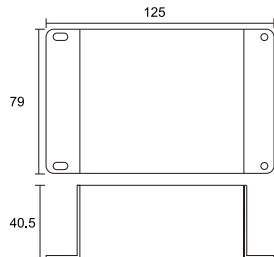

SV-PS10/11


Access control power supply



Parameter :

Model	SV-PS10	SV-PS11
Input voltage	AC100V-240V 50/60Hz	
Output voltage	DC12V±15%	
Working ripple	≤100mV	
Output current	3A	5A
Standard battery	NO	
Weight	0.35kg	
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

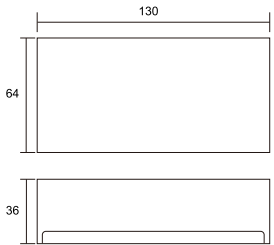

SV-PS04/05


Linear power supply



Parameter :

Model	SV-PS04	SV-PS05
Input voltage	AC220V±20%	
Output voltage	DC12V±15%	
Working ripple	≤100mV	
Output current	3A	5A
Standard battery	NO	
Weight	1.25kg	
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

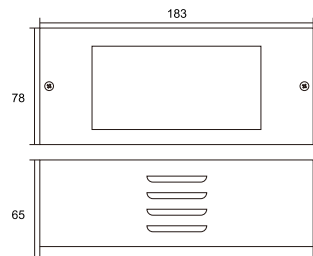

SV-PS12/13


Access control power supply



Parameter :

Model	SV-PS12	SV-PS13
Input voltage	AC220V±20%	
Output voltage	DC12V±15%	
Working ripple	≤100mV	
Output current	3A	5A
Standard battery	NO	
Weight	1.25kg	
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

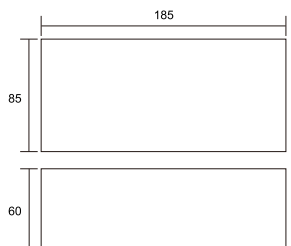

SV-PS06/07


Linear power supply



Parameter :

Model	SV-PS06	SV-PS07
Input voltage	AC220V±20%	
Output voltage	DC12V±15%	
Working ripple	≤120mV	
Output current	3A	5A
Standard battery	12V/7Ah	
Weight	1.7kg	
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

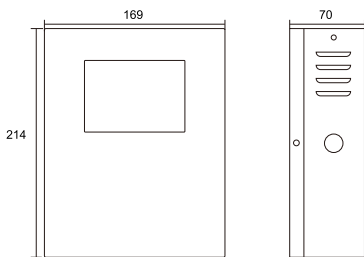

SV-PS14/15


Uninterrupted Power Supply



Parameter :

Model	SV-PS14	SV-PS15
Input voltage	AC220V 50Hz	
Output voltage	DC12V	
Timer	0-10S	
Output current	3A	5A
Standard battery	12V/7Ah	
Weight	1.7kg	
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

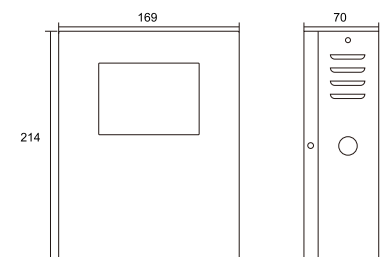

SV-PS08/09


Switching power supply



Parameter :


Model	SV-PS08	SV-PS09
Input voltage	AC220V±20%	
Output voltage	DC12V±15%	
Working ripple	≤120mV	
Output current	3A	5A
Standard battery	12V/7Ah	
Weight	1.05kg	1.5kg
Material	Metal shell; Surface paint	
Suitable for	Access control, electric lock	

Size(mm):

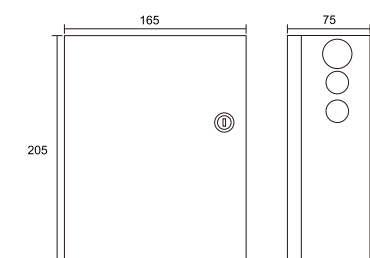

SV-PS16


Switching power supply



Parameter :

Model	SV-PS16
Input voltage	AC110V/AC220V
Output voltage	DC12V±15%
Working ripple	≤120mV
Output current	5A
Standard battery	NO
Weight	1.05kg
Material	Metal shell; Surface paint
Suitable for	Access control, electric lock

Size(mm):

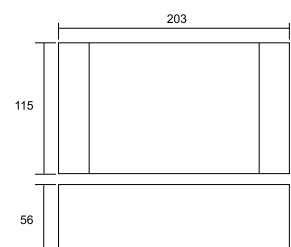


SV-900

Exit button (Plastic)



Parameter :

Model	SV-900
Power Supply	DC12V
Output Contact	NO/NC/COM
Material	ABS
Panel logo	Customizable
Operating Temp	-20 C ~ +55 C (-4-131F)
Weight	0.05kg
Mechanical Life	500,000 Tested aging test qualified

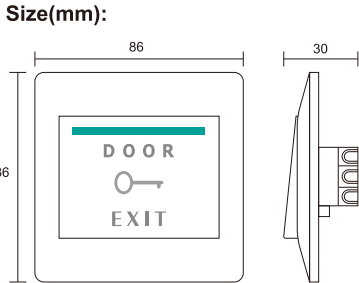


SV-907/908

Exit button (Infrared sensor)



Parameter :

Model	SV-907	SV-908
Power Supply	DC12V-24V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.85kg	0.1kg
Mechanical Life	500,000 Tested aging test qualified	

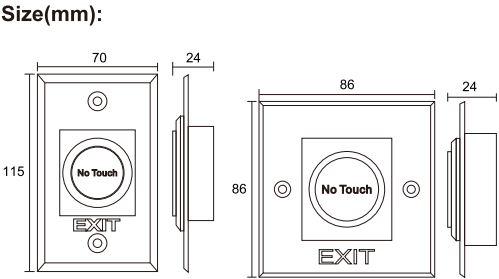


SV-901/902

Exit button (Aluminum alloy)



Parameter :

Model	SV-901	SV-902
Power Supply	DC12V	
Output Contact	NO/COM	
Material	Aluminum Alloy	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.11kg	0.16kg
Mechanical Life	500,000 Tested aging test qualified	

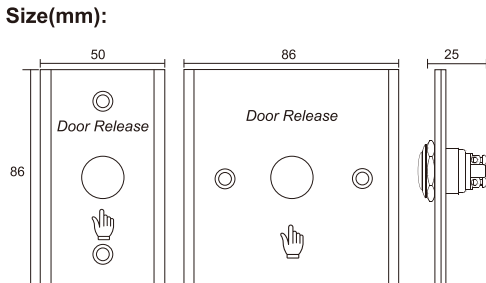


SV-909

Mini Exit button



Parameter :

Model	SV-909
Power Supply	DC12V
Output Contact	NO/COM
Material	Aluminium alloy
Panel logo	Customizable
Operating Temp	-20 C ~ +55 C (-4-131F)
Weight	0.1kg
Mechanical Life	500,000 Tested aging test qualified

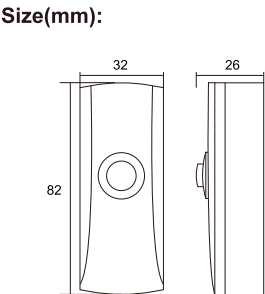


SV-903/904

Exit button (Stainless steel)



Parameter :

Model	SV-903	SV-904
Power Supply	DC12V	
Output Contact	NO/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.05kg	0.1kg
Mechanical Life	500,000 Tested aging test qualified	

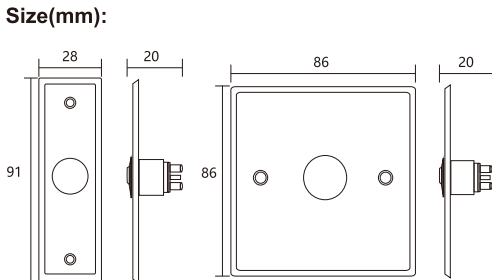


SV-910/911

Exit button (Stainless steel)



Parameter :

Model	SV-910	SV-911
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.1kg	0.12kg
Mechanical Life	500,000 Tested aging test qualified	

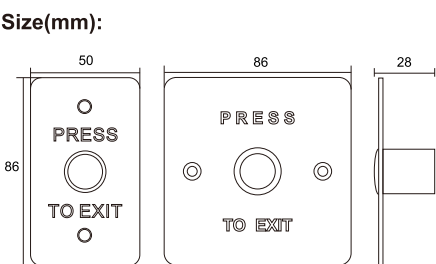


SV-905/906

Exit button (Stainless steel)




Parameter :

Model	SV-905	SV-906
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.05kg	0.1kg
Mechanical Life	500,000 Tested aging test qualified	

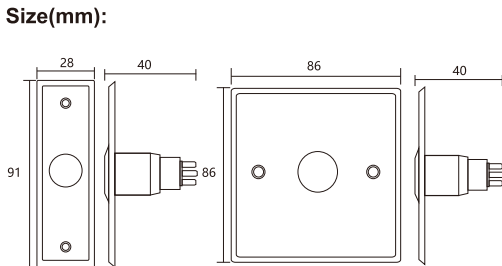


SV-912/913

Exit button (Touch)

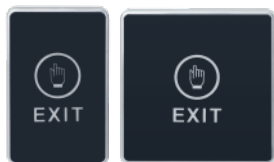

Parameter :

Model	SV-912	SV-913
Power Supply	DC12-24V	
Output Contact	NO/NC/COM	
Material	ABS	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.085kg	0.1kg
Mechanical Life	500,000 Tested aging test qualified	

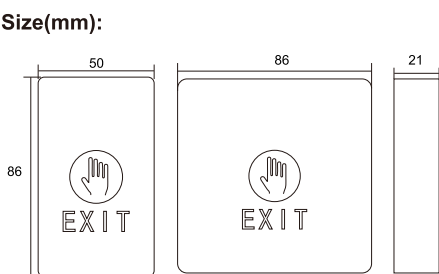

SV-914/915


Exit button (Mushroom)



Parameter :

Model	SV-914	SV-915
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~+55 C (-4-131F)	
Weight	0.14kg	0.18kg
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

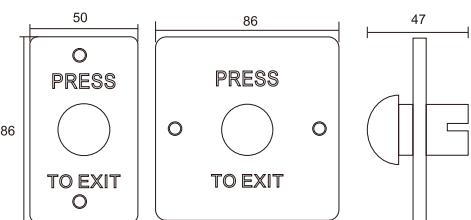

SV-920A/B


Emergency exit button



Parameter :

Model	SV-920A	SV-920B
Power Supply	DC12V	
Output Contact	NO/NC/COM	2NO/2NC/2COM
Material	ABS	
Panel logo	Customizable	
Operating Temp	-20 C ~+55 C (-4-131F)	
Weight	0.16kg	
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

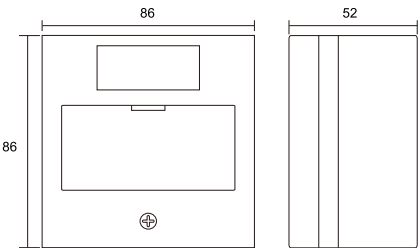

SV-84/87


Exit button (Stainless steel)



Parameter :

Model	SV-84	SV-87
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Waterproof	IP66 Outdoor Waterproof	
Weight	0.083kg	0.12kg
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

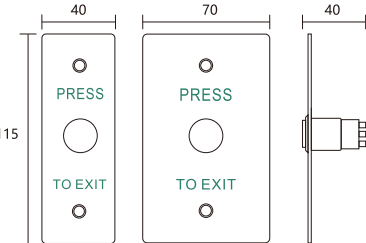

SV-921


Emergency exit button



Parameter :

Model	SV-921
Power Supply	DC12V
Output Contact	NO/NC/COM
Material	ABS
Panel logo	Customizable
Operating Temp	-20 C ~+55 C (-4-131F)
Weight	0.16kg
Mechanical Life	500,000 Tested aging test qualified

Size(mm):

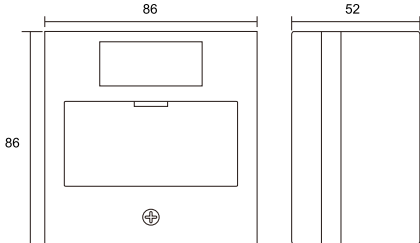

SV-85/86


Exit button (Stainless steel)



Parameter :

Model	SV-85	SV-86
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Waterproof	IP66 Outdoor Waterproof	
Weight	0.08kg	0.12kg
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

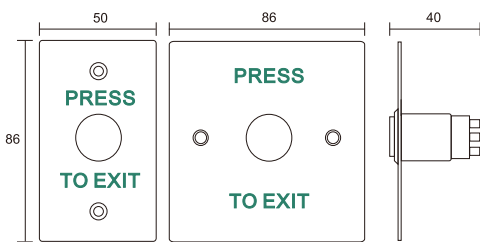

SV-923A/B


Emergency exit button



Parameter :

Model	SV-923A	SV-923B
Power Supply	DC12V	
Output Contact	NO/NC/COM	2NO/2NC/2COM
Material	ABS	
Panel logo	Customizable	
Operating Temp	-20 C ~+55 C (-4-131F)	
Weight	0.16kg	
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

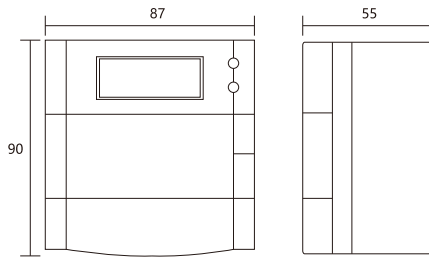

SV-930


Exit button (With key)



Parameter :

Model	SV-930
Power Supply	DC12V
Output Contact	NO/NC/COM
Material	Stainless steel panel
Panel logo	Customizable
Standard key	2 PCS
Weight	0.13kg
Mechanical Life	500,000 Tested aging test qualified

Size(mm):

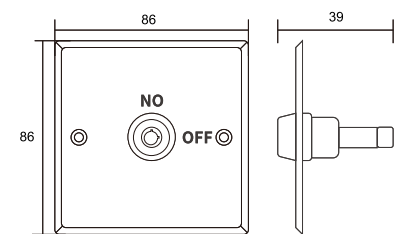

SV-924


Emergency exit button



Parameter :

Model	SV-924
Power Supply	DC12V
Output Contact	NO/NC/COM
Material	ABS
Panel logo	Customizable
Operating Temp	-20 C ~+55 C (-4-131F)
Weight	0.18kg
Mechanical Life	500,000 Tested aging test qualified

Size(mm):

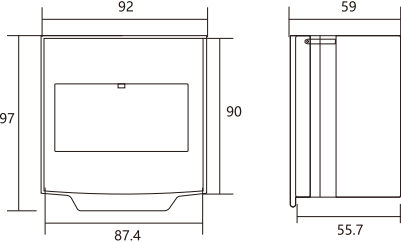

SV-943A/B


Exit button (Touchless)



Parameter :

Model	SV-943A	SV-943B
Power Supply	DC12V	
Output Contact	NO/NC/COM	
Material	Stainless steel panel	
Panel logo	Customizable	
Operating Temp	-20 C ~ +55 C (-4-131F)	
Weight	0.11kg	0.14kg
Mechanical Life	500,000 Tested aging test qualified	

Size(mm):

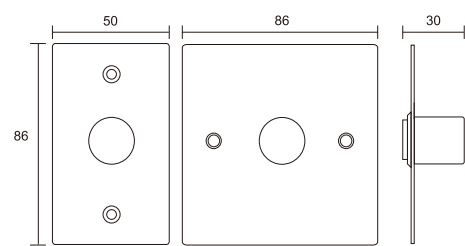

SV-962F/S


Door Loop



Parameter :

Model	SV-962F	SV-962S
Groove Material	Iron	Stainless Steel
Hose Material	Stainless steel	
Head Material	Zinc Alloy	
Inner Diameter	10mm	
Hose Size	200mm	
Weight	0.32kg	
Used for	Prevent the cable from malicious damage.	

Size(mm):

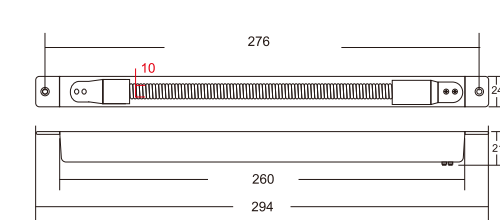

SV-950


Remote exit button



Parameter :

Model	SV-950
Power Supply	DC12V
Output Contact	NO/NC/COM
Material	ABS
Panel logo	Customizable
Capacity	30
Weight	0.11kg
Remote control distance	30-50mm

Size(mm):

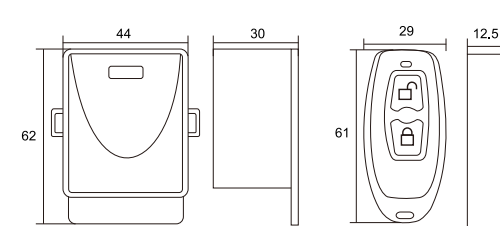

SV-963F/S


Door Loop



Parameter :

Model	SV-963F	SV-963S
Groove Material	Iron	Stainless Steel
Hose Material	Stainless steel	
Head Material	Zinc Alloy	
Inner Diameter	9mm	
Hose Size	200mm	
Weight	0.32kg	
Used for	Prevent the cable from malicious damage.	

Size(mm):

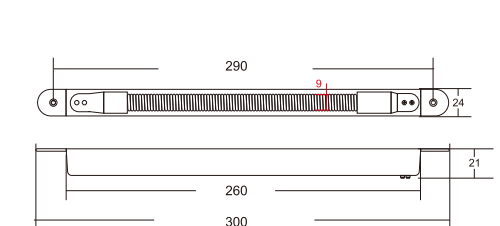

SV-960/960P


Door Loop



Parameter :

Model	SV-960	SV-960P
Head material	Zinc alloy	ABS
Material	Stainless steel	
Inner Diameter	10mm	
Inside Diameter	13mm	
Head Color	Silver/Black	
Weight	0.17kg	0.07kg
Used for	Prevent the cable from malicious damage.	

Size(mm):

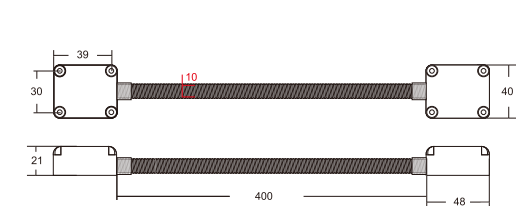

SV-964


Door Loop



Parameter :

Model	SV-964
Material	Stainless Steel
Spring Size	Φ7*Φ11*130mm
Inner Diameter	7mm
Installation Diameter	Φ15mm/Φ11mm
Weight	0.06kg
Size For Metar Plate	20*50mm
Installation mode	Surface-mount

Size(mm):

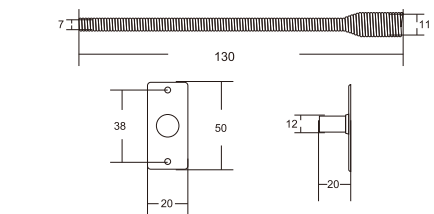

SV-961/961P


Door Loop



Parameter :

Model	SV-961	SV-961P
Head material	Zinc alloy	Plastic
Material	Stainless steel	
Inner Diameter	8mm	
Inside Diameter	10mm	
Head Color	Silver/Black	
Weight	0.06kg	0.032kg
Used for	Prevent the cable from malicious damage.	

Size(mm):

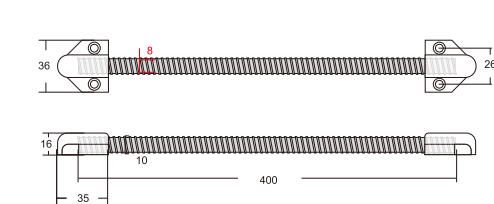

SV-965


Door Loop



Parameter :

Model	SV-965
Product name	Non-Contact Wire Protector
Material	High Strength Plastic
Size	58*16*12mm
Contact Material	Plated brass
Installation mode	Surface-mount
Weight	0.04kg
Suitable for	All kinds of the single door & double door

Size(mm):

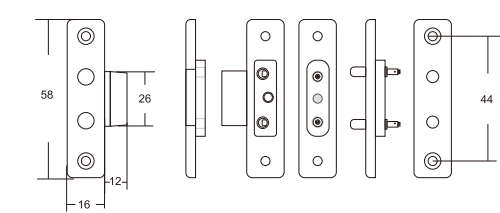

SV-EM01/MF01


RFID Thin Cards



Parameter :

Model	SV-EM01	SV-MF01
Frequency	125KHz	13.56MHz
Material	PVC	
Colour	White	
Card type	ID-EM	IC -Mifare
Inductive range	2-15mm	
Reaction Time	1-2mS	
Temperature	-100 C ~+500 C	
Weight	0.008kg	

Size(mm):

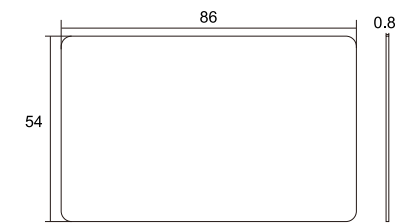

SV-EM04/MF04


Round Coin Card



Parameter :

Model	SV-EM04	SV-MF04
Frequency	125KHz	13.56MHz
Material	PVC	
Colour	White	
Card type	ID Card	IC Card
Size	25mm can be customized	
Suitable for	Community access control, time attendance, parking lot	
Weight	0.008kg	

Size(mm):

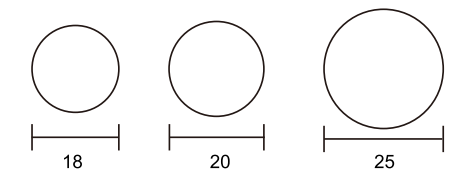

SV-EM01T/MF01T


RFID Thick Cards



Parameter :

Model	SV-EM01T	SV-MF01T
Frequency	125KHz	13.56MHz
Material	PVC	
Colour	White	
Card type	ID-EM	IC -Mifare
Inductive range	2-15mm	
Reaction Time	1-2mS	
Temperature	-100 C ~+500 C	
Weight	0.01kg	

Size(mm):

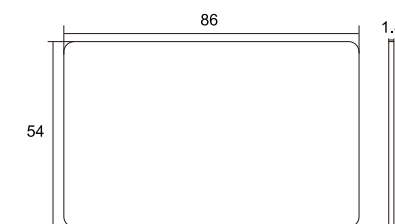

SV-EM05/MF05


Wrist Bands



Parameter :

Model	SV-EM05	SV-MF05
Frequency	125KHz	13.56MHz
Material	Silicone	
Colour	Customization available	
Card type	ID-EM	IC -Mifare
Size	Stock size or customized	
Application	Access Control, Party, Events, sauna, Training etc.	
Weight	0.01kg	

Size(mm):

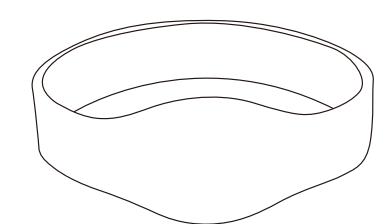

SV-EM02/MF02


Keytags



Parameter :

Model	SV-EM02	SV-MF02
Frequency	125KHz	13.56MHz
Material	ABS	
Colour	Support Customized	
Card type	ID-EM	IC -Mifare
Inductive range	2-15mm	
Reaction Time	1-2mS	
Temperature	-100 C ~+500 C	
Weight	0.01kg	

Size(mm):

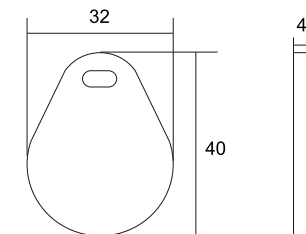

SV-MF06


UHF TAGS



Parameter :

Model	SV-MF06
Chip	M4QT
Antenna size	70*17mm
Protocol	ISO18000-6C/EPC GEN2
Read distance	5m
Application	Mainly used in logistic warehouse management
Temperature	-100 C ~+500 C
Weight	0.001kg

Size(mm):

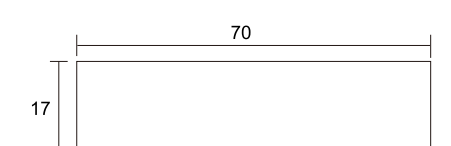

SV-EM03/MF03


Glue Epoxy Cards



Parameter :

Model	SV-EM03	SV-MF03
Frequency	125KHz	13.56MHz
Material	Glue Epoxy	
Colour	Support Customized	
Card type	ID-EM	IC -Mifare
Inductive range	2-15mm	
Reaction Time	1-2mS	
Temperature	-100 C ~+500 C	
Weight	0.01kg	

Size(mm):

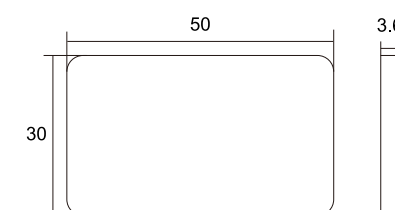

SV-MF07


HF TAGS



Parameter :

Model	SV-MF07
Chip	FM1108/Ultralight EV1
Antenna size	11*26mm
Protocol	ISO14443A
Reader range	6m
Color	White
Base Material	Coated Paper
Application	Anti-counterfeiting traceability, data transmission

Size(mm):

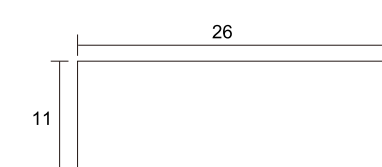


SV-RD10/11

RFID card reader



Parameter :

Model	SV-RD10	SV-RD11
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	3-15cm	3-6cm
Power supply	DC12V	
Material	ABS + PC with Texture	
Waterproof level	IP65	
Weight	120g	
Output Interface	Standard Wiegand26, Optional wiegand34 or RS232/485	

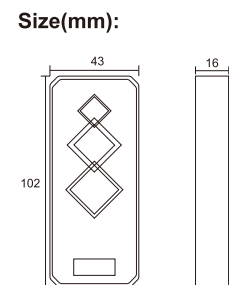


SV-RD50/51

RFID card reader



Parameter :

Model	SV-RD50	SV-RD51
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5 cm	3-8cm
Power supply	DC12V	
Material	ABS	
User capacity	Support 2000 users	
Weight	150g	
Wiegand input	With Wiegand input interface, Wg26 card number or Wg34 card numberoutput	

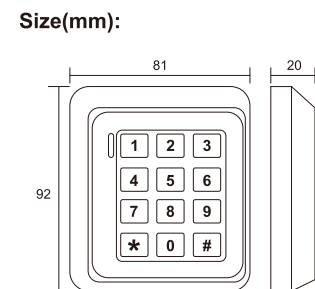


SV-RD20/21

RFID card reader



Parameter :

Model	SV-RD20	SV-RD21
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	1-5cm	BLE:0-5M
Power supply	9-12VDC	
Current	Average 50mA, maxmium100mA	
Material	ABS	
Weight	200g	
Communication interface	Wiegand 26/34,RS232	

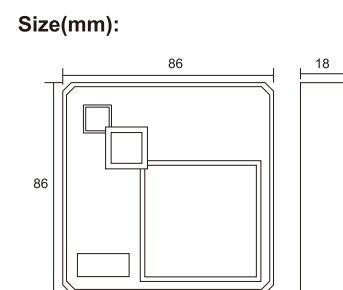


SV-RD60/61

RFID card reader



Parameter :

Model	SV-RD60	SV-RD61
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5 cm	3-8cm
Power supply	DC12V	
Material	ABS	
Waterproof class	IP68	
Weight	150g	
Wiegand Interface	WG26/34	

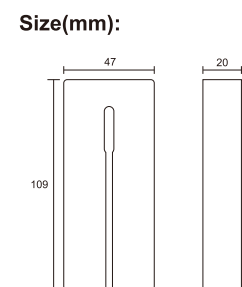


SV-RD30/31

RFID card reader



Parameter :

Model	SV-RD30	SV-RD31
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	1-5cm	BLE:0-5M
Power supply	9-12VDC	
Current	Average 50mA, maxmium100mA	
Material	ABS	
Weight	200g	
Communication interface	Wiegand 26/34,RS232	

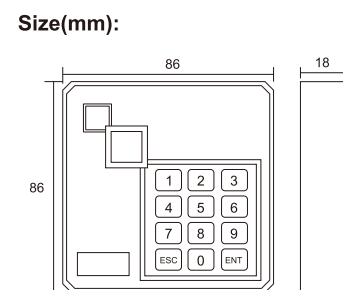


SV-RD70/71

RFID card reader



Parameter :

Model	SV-RD70	SV-RD71
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5 cm	3-8cm
Power supply	DC12V	
Material	ABS	
Waterproof class	IP68	
Weight	150g	
Wiegand Interface	WG26/34	

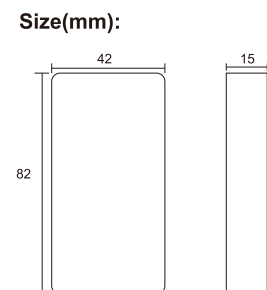


SV-RD40/41

RFID card reader



Parameter :

Model	SV-RD40	SV-RD41
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	3-8cm	5~10cm
Power supply	DC 9V-16V	
Consumed current	<60mA	
Material	ABS	
Weight	200g	
Communication interface	Wiegand26/34,RS232,RS485	

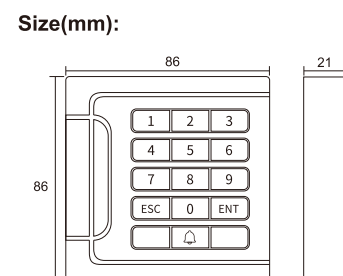


SV-RD80/81

RFID card reader



Parameter :

Model	SV-RD80	SV-RD81
Card type	125KHz ID Card	13.56MHz IC Card
Reading distance	2~5 cm	3~8 cm
Power supply	12V DC	
Material	ABS	
Waterproof class	IP66	
Weight	100g	
Output Format	Wiegand 26 bits (26~37 bits available upon request)	

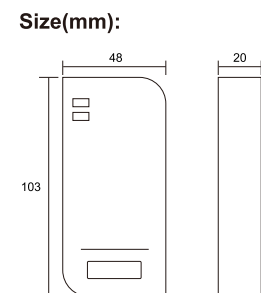


SV-AC01/02

Access control keypad



Parameter :

Model	SV-AC01	SV-AC02
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	0-10 cm	3-5cm
Power supply	DC 12V±10%	
Material	Plastic	
Password length	4-6 digitals	
Card quantity	800 cards	
Waterproof grade	NO	
Door open options	Card,Password /Password +Card	

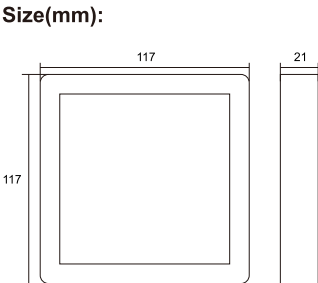


SV-MA20/21

Metal access control



Parameter :

Model	SV-MA20	SV-MA21
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	5-8 cm	3-6cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Static electricity	≤30mA	
User capacity	2000	
Waterproof grade	IP68	
Door open options	Card, PIN, Card + PIN	

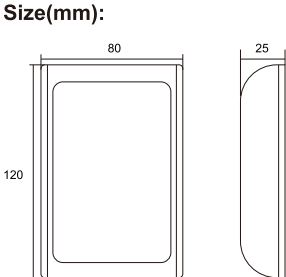


SV-AC03/04

Touch access control



Parameter :

Model	SV-AC03	SV-AC04
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	3-5 cm	5-15cm
Power supply	DC 12V±10%	
Material	ABS	
Password length	4-6 digitals	
Card quantity	1000 cards	
Waterproof grade	NO	
Door open options	Card,Password /Password +Card	

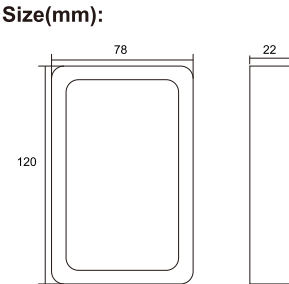


SV-MA30/31

Metal access control



Parameter :

Model	SV-MA30	SV-MA31
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	5-15cm	3-5cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Current Drain	≤30mA	
User capacity	1000 cards	
Waterproof grade	IP65	
Door open options	Card	




SV-AC08E/M

Metal access control



Parameter :

Model	SV-AC08-E	SV-AC08-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	3-8cm	2-6cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Static electricity	≤30mA	
User capacity	2000 users	
Waterproof grade	IP65	
Door open options	Card,Password /Password +Card	




SV-MA50/51

Metal access control



Parameter :

Model	SV-MA50	SV-MA51
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	5-15cm	3-5cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Current Drain	≤30mA	
User capacity	1000 cards	
Waterproof grade	IP65	
Door open options	Card, PIN, Card + PIN	




SV-MA10/11

Metal access control



Parameter :

Model	SV-MA10	SV-MA11
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	5-8 cm	3-6cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Static electricity	≤30mA	
User capacity	2000	
Waterproof grade	IP68	
Door open options	Card, PIN, Card + PIN	




SV-8001E/M

Touch screen access control



Parameter :

Model	SV-8001-E	SV-8001-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	3-6cm	2-5cm
Power supply	DC 12V±10%	
Material	Plastic Shell	
Static Electricity	≤30mA	
User capacity	1000 cards	
Waterproof grade	IP66	
Door open options	Card, PIN, Card + PIN	



SV-8002E/M


Touch screen access control



Parameter :

Model	SV-8002-E	SV-8002-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	1-3cm	2-5cm
Power supply	DC 12V±10%	
Material	Plastic Shell	
Static Electricity	≤30mA	
User capacity	2000 users	
Waterproof grade	IP66	
Door open options	Card, PIN, Card + PIN	

Size(mm):



SV-8006E/M


Fingerprint access control



Parameter :

Model	SV-8006-E	SV-8006-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5cm	3-6cm
Power supply	DC 12-24V	
Material	Zinc Alloy	
Standby current	≤35mA	
User capacity	10,000 users , Fingerprint: 256	
Waterproof grade	IP68	
Door open options	Fingerprint, Card, PIN, Card + PIN	

Size(mm):



SV-8003E/M


Touch screen access control



Parameter :

Model	SV-8003-E	SV-8003-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	2-6cm	1-15cm
Power supply	DC 12V±10%	
Material	ABS	
Operating current	<100mA	
User capacity	1000 users	
Waterproof grade	IP66	
Door open options	Card, PIN, Card + PIN	

Size(mm):



SV-8007E/M


Fingerprint access control



Parameter :


Model	SV-8007-E	SV-8007-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5cm	3-6cm
Power supply	DC12V±10%	
Material	Zinc Alloy	
Standby current	≤60mA	
User capacity	Fingerprint : 2000/ Card : 1000	
Waterproof grade	IP68	
Door open options	Fingerprint, Card, PIN, Card + PIN	

Size(mm):



SV-8004E/M


Metal access control



Parameter :

Model	SV-8004-E	SV-8004-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	2-5cm	3-6cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Static electricity	≤35mA	
User capacity	2000	
Waterproof grade	IP68	
Door open options	Card, PIN, Card + PIN	

Size(mm):



SV-8008E/M


WiFi keypad access control



Parameter :

Model	SV-8008-E	SV-8008-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5cm	3-6cm
Power supply	DC12V±10%	
Material	Plastic case	
Standby current	≤30mA	
User capacity	10.000user	
Waterproof grade	IP65	
Door open options	Mobile APPCard, code, card + code,	

Size(mm):



SV-8005E/M


Metal access control



Parameter :

Model	SV-8005-E	SV-8005-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading Distance	2-5cm	3-6cm
Power supply	DC 12V±10%	
Material	Zinc Alloy	
Static electricity	≤35mA	
User capacity	10,000 users	
Waterproof grade	IP68	
Door open options	Fingerprint, Card, PIN, Card + PIN	

Size(mm):



SV-8009E/M


Touch Screen access control



Parameter :

Model	SV-8009-E	SV-8009-M
Card Type	125KHz ID Card	13.56MHz IC Card
Reading distance	2-5cm	3-6cm
Power supply	DC12-24V	
Material	Plastic case	
Static electricity	≤35mA	
User capacity	2000 cards / codes	
Waterproof grade	IP65	
Door open options	Card, Pin, Card + Pin	

Size(mm):



SV-A210F

Fingerprint smart lock



Parameter :

Model	SV-A210F
Material	304#stainless steel, ABS,arcylic
Available Color	Satin Nickle and Black Nickle
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AAA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	2885/3585/4585/5085/6085/7085 Mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A233

Fingerprint smart lock



Parameter :

Model	SV-A233
Material	Aluminum Alloy,ABS,Arcylic
Available Color	Black/Satin Nickel
Door Thickness	35-60(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5050/5572/5072/4585/6085/KS mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A220F

Smart deadbolt lock



Parameter :

Model	SV-A220F
Material	Aluminum Alloy,ABS,Arcylic
Available Color	Black and Satin Nickel
Door Thickness	35-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60/70 adjustable deadbolt mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A260

Fingerprint smart lock



Parameter :

Model	SV-A260
Material	Aluminum Alloy,ABS,Arcylic
Available Color	Black/Satin Nickel
Door Thickness	35-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5050/5572/5072/4585/6085/KS mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A230N

Fingerprint smart lock



Parameter :

Model	SV-A230N
Material	Aluminum Alloy,ABS,Arcylic
Available Color	Black/Satin Nickel
Door Thickness	35-60(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5050/5572/5072/4585/6085/KS mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A270

Fingerprint smart lock



Parameter :

Model	SV-A270
Material	Aluminum Alloy, ABS, Tempered Glass
Available Color	Black/Satin Nickel
Door Thickness	35-60(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5050/5572/5072/4585/6085/KS mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-A290F

Fingerprint smart lock



Parameter :

Model	SV-A290F
Material	Aluminum alloy,ABS,Arcylic
Available Color	Black Nickel/Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AAA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60/68mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-K710

Fingerprint smart lock



Parameter :

Model	SV-K710
Material	Aluminum Alloy,ABS,Arcylic
Available Color	Black/Satin Nickel
Door Thickness	35-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	4585/6085/7085 mortise; 5572
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-E908

Fingerprint smart lock



Parameter :

Model	SV-E908
Material	Aluminum alloy,ABS,Tempered glass
Available Color	Black Nickel/Satin Nickel
Door Thickness	35-64(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	4585/5085/6085/7085/5572/6072 mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-H168

Fingerprint Handle Door Lock



Parameter :

Model	SV-H168
Material	Zinc alloy
Available Color	Black/Satin Nickel
Door Thickness	35-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AAA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	6050/5572/4585/6085/7085 mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-E908NF

Fingerprint smart lock



Parameter :

Model	SV-E908NF
Material	Aluminum alloy,ABS,Tempered glass
Available Color	Black Nickel/Satin Nickel
Door Thickness	35-64(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	4585/6085/7085/5572/6072 mortise
User Capacity	300 groups; Administrator: 9 groups
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-K3

Smart Key box



Parameter :

Model	SV-K3
Material	Zinc alloy
Available Color	Black/Satin Nickel
Door Thickness	35-60(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth 4.0 BLE
Battery Life	7000 times normal open
Power Supply	DC6V :4pcs AAA alkaline batteries
Dynamic Current	<200mA
Unlock Time	1-1.5seconds
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Fingerprint Capacity	200 groups
Passcode Capacity	200 groups
Suitable for Doors	All kinds of doors and locks

SV-F2

Fingerprint smart lock



Parameter :

Model	SV-F2
Material	Zinc alloy panel/handle
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AAA alkaline battery
Lock Dimension	36x345x57mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585;2885 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-F5 pro

Fingerprint smart lock



Parameter :

Model	SV-F5 pro
Material	Aluminum alloy panel/handle
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	36x330x64mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-F3

Fingerprint smart lock



Parameter :

Model	SV-F3
Material	Zinc alloy panel/handle
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AAA alkaline battery
Lock Dimension	36x345x57mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585;2885 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-Z1

Fingerprint smart lock



Parameter :

Model	SV-Z1
Material	CNC solid carved material
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi
Battery Life	300,000 times life test
Power Supply	lithium battery of 7.4V, 3200MAH
Lock Dimension	38x420x26mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-F5

Fingerprint smart lock



Parameter :

Model	SV-F5
Material	Aluminum alloy panel/handle
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	36x330x64mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585;2885 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-Z1 pro

Fingerprint smart lock



Parameter :

Model	SV-Z1 pro
Material	CNC solid carved material
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	lithium battery of 7.4V, 3200MAH
Lock Dimension	38x420x26mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	3585 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-D1 pro

Fingerprint smart lock



Parameter :

Model	SV-D1 pro
Material	CNC solid carved material
Color	Black
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi
Battery Life	300,000 times life test
Power Supply	lithium battery of 7.4V, 4200MAH
Lock Dimension	75x420x58mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5572/6072 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-T1 pro

Smart Ddeadbolt Lock



Parameter :

Model	SV-T1 pro
Material	Zinc alloy panel
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	Front:70x158x20mm;Black:68x155x28mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60-70mm Single latch
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-G1

Fingerprint smart lock



Parameter :

Model	SV-G1
Material	Aluminum alloy panel/handle
Color	Black
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	65x280x21mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	5050 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-S1

Smart handle lock



Parameter :

Model	SV-S1
Material	Zinc alloy panel
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AAA alkaline battery
Lock Dimension	65x65x15mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60-70mm Single latch
Unlock Way	Password, Fingerprint, APP, Key

SV-T1

Smart Ddeadbolt Lock



Parameter :

Model	SV-T1
Material	Zinc alloy panel
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	Front:60x140x16mm;Black:68x155x28mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60-70mm Single latch
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-T3

Smart handle lock



Parameter :

Model	SV-T3
Material	Zinc alloy panel
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya /TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AAA alkaline battery
Lock Dimension	65x65x15mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60-70mm Single latch
Unlock Way	Password, Fingerprint, APP, Key

SV-B2

Fingerprint smart lock



Parameter :

Model	SV-B2
Material	Aluminum alloy panel/handle
Color	Black
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	65x255x21mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	KS Mortise/5050/5072/5572/6072 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-FLL2

Fingerprint smart lock



Parameter :

Model	SV-FLL2
Material	Aluminum alloy panel/handle
Color	Black/Silver/Red bronze
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	60x250x21mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	KS Mortise/5050/5072/6072/4585 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-K1

Fingerprint smart lock



Parameter :

Model	SV-K1
Material	Aluminum alloy panel/handle
Color	Black /Silver
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi
Battery Life	300,000 times life test
Power Supply	Alkaline battery
Lock Dimension	75x370x24mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	6068 mortise
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-FLL5

Fingerprint smart lock



Parameter :

Model	SV-FLL5
Material	Aluminum alloy panel/handle
Color	Black/Silver/Red bronze
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	65x255x21mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60/85,55/72 mortise or single latch
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-V1

Smart Ddeadbolt Lock



Parameter :

Model	SV-V1
Material	Zinc alloy panel
Color	Black
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi
Battery Life	300,000 times life test
Power Supply	4pcs AA alkaline battery
Lock Dimension	190x73x66mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60-70mm Single latch
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-FLL7

Fingerprint smart lock




Parameter :

Model	SV-FLL7
Material	Aluminum alloy panel/handle
Color	Black/Silver/Red bronze
Door Thickness	38-55(mm)
Communication	Tuya Wi-Fi/TT Lock Bluetooth
Battery Life	300,000 times life test
Power Supply	4pcs AAA alkaline battery
Lock Dimension	65x255x21mm
Working Temperature	-20~45 degree
Working Humidity	10%~95%
Available Mortise	60/85,55/72 mortise or single latch
Unlock Way	Card, Password, Fingerprint, APP, Key

SV-BC10B

Smart lock cylinder

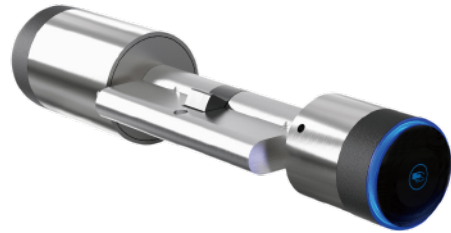


Parameter :

Model	SV-BC10B
Material	Stainless Steel/Aluminum Alloy
Card Capacity	200pcs
Administrative password	1 group
Working Voltage	DC6V(4alkaline battery)
Quiescent Dissipation	≤12mA
Low Voltage Warning	≤4.8V
Battery Life	≥10000 operation times
Suitable	Home/Hotel/Apartment/Office
Cylinder dimension	75mm/95mm/105mm(Customizable)
Working temperature	-20°C~50°C
Unlock Way	Card, Password, APP

SV-BC20C

Smart lock cylinder

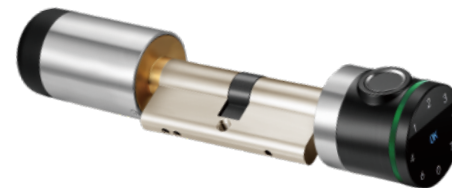


Parameter :

Model	SV-BC20C
Material	Stainless Steel
Password Capacity	100 pieces
Card Capacity	100 pieces
Fingerprint Capacity	80 pieces
Quiescent Dissipation	≤12mA
Low Voltage Warning	15%
Remark	Lora Gateway Optional
Suitable	Home/Hotel/Apartment/Office
Cylinder Dimension	75mm/95mm/105mm(Customizable)
Working Temperature	-20°C~50°C
Unlock Way	Card, Password, APP

SV-BC10C

Smart lock cylinder

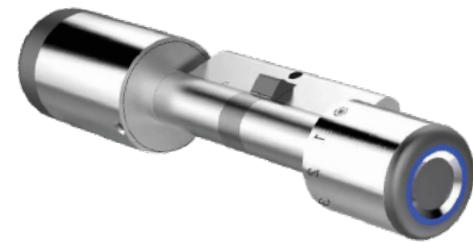


Parameter :

Model	SV-BC10C
Material	Stainless Steel/Aluminum Alloy
Fingerprint Capacity	128pcs
Administrative Password	1 group
Working Voltage	DC6V(4alkaline battery)
Quiescent Dissipation	≤12mA
Low Voltage Warning	≤4.8V
Battery Life	≥10000 operation times
Suitable	Home/Hotel/Apartment/Office
Cylinder Dimension	75mm/95mm/105mm(Customizable)
Working Temperature	-20°C~50°C
Unlock Way	Fingerprint, Password, APP

SV-S1

Smart lock cylinder

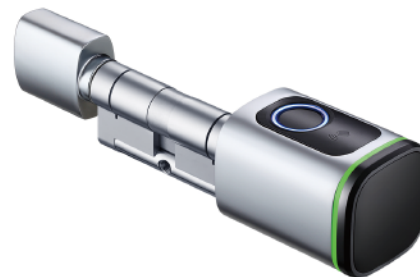


Parameter :

Model	SV-S1
Material	Aluminum Alloy, Brass
Available Color	Silver/Black
Door Thickness	35-60mm
Power Supply	1pcs CR123A alkaline batteries
Dynamic Current	<200mA
Static Current	≤50uA
Battery Life	7000 times normal unlock
Support OS	IOS 7.0 or above, Android 4.4 or above
Unlock Time	1~1.5 seconds
Working Temperature	-20°C~50°C
Unlock Way	App/ Fingerprint/ IC card/ Key

SV-BC20B

Smart lock cylinder

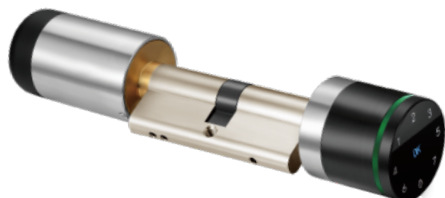

Parameter :

Model	SV-BC20B
Material	Stainless Steel
Password Capacity	100 pieces
Card Capacity	100 pieces
BT key user	30pcs
Quiescent Dissipation	≤12mA
Low Voltage Warning	15%
Remark	Lora Gateway Optional
Suitable	Home/Hotel/Apartment/Office
Cylinder Dimension	75mm/95mm/105mm(Customizable)
Working Temperature	-20°C~50°C
Unlock Way	Card, Password, APP

SV-S1K

Smart lock cylinder



Parameter :

Model	SV-S1K
Material	Aluminum Alloy, Brass
Available Color	Silver/Black
Door Thickness	35-60mm
Power Supply	1pcs CR123A alkaline batteries
Dynamic Current	<200mA
Static Current	≤50uA
Battery Life	7000 times normal unlock
Support OS	IOS 7.0 or above, Android 4.4 or above
Unlock Time	1~1.5 seconds
Working Temperature	-20°C~50°C
Unlock Way	App/ Password/ IC card/ Key

SV-AI06F

Facial Recognition Access Control



Parameter :

Model	SV-AI06F
Working voltage	DC12V
Face capacity	5000 (20000 optional)
Fingerprint Capacity	10000
Card Capacity	ID Card Standard, IC Card Optional
Password Capacity	5000(20000 optional)
Recognition Speed	≤0.2S
Recognition Distance	0.5~2.5meters
Power Supply	DC12V interface x 1
Screen	4.3 Inch Touch Screen
Installation Way	Standard:Wall mount,desktop stand etc.
Dimension	187.5x87.5x26mm
USB	USB2.0x1 , Support U disk import/export data
Multiple Recognition	Face, Fingerprint, Card and Password

SV-FA2

Facial Recognition Access Control



Parameter :

Model	SV-FA6
Working Voltage	DC12V 2A
Shell Material	ABS
Screen Size	4 inches
Face Capacity	3000
Card Capacity	3000
Read Card Type	IC Card
Unlocking Method	Face/IC Card/Password
Waterproof Function	NO
Attendance Function	Yes
External Doorbell	NO
Dimension	158*76*20mm

SV-AI08FW

Facial Recognition Access Control



Parameter :

Model	SV-AI08FW
Working Voltage	DC12V 2A
Face capacity	50000
Fingerprint Capacity	100,000
Password/Card Capacity	50000
Recognition Speed	≤0.2S
Recognition Distance	0.5~2.5meters
Language	Support Multi-language
CPU,NPU	1.2G Dual-Core ARM Cortex-A7, 1200G(1.2T)
Waterproof	IP65
Case Material	Aluminum alloy
Dimension	256mm*132.6mm*20mm
Display	8 inch HD TFT Color LCD
Multiple Recognition	Face, Fingerprint, ID&IC card, Password

SV-FA6

Facial Recognition Access Control



Parameter :

Model	SV-FA6
Working Voltage	DC12V 2A
Shell Material	ABS
Screen Size	5 inches
Face Capacity	3000
Card Capacity	3000
Read Card Type	IC Card
Unlocking Method	Face/IC Card/Password
Waterproof Function	Yes
Attendance Function	Yes
External Doorbell	NO
Dimension	166*86*26mm

SV-AI20

Facial Recognition Access Control



Parameter :

Model	SV-AI20
Working Voltage	DC12V 2A
Face capacity	5000
Logs capacity	5000
Password/Card Capacity	5000
Recognition Speed	≤0.2S
Recognition Distance	0.5~2.5meters
Power Supply	DC12V interface x 1
Screen	2.8 Inch Touch Screen
Communication	TCP/IP, USB; WIFI optional
Wiegand	Wiegand Input/Output
Dimension	165 x 80 x 25mm
Display	2.8 inch Electronic Capacity Touch Screen
Multiple Recognition	Face, Fingerprint, ID&IC card, Password

SV-FA6D

Facial Recognition Access Control



Parameter :

Model	SV-FA6D
Working Voltage	DC12V 2A
Shell Material	ABS
Screen Cize	5 inches
Face Capacity	3000
Card Capacity	3000
Read Card Type	IC Card
Unlocking Method	Face/IC Card/Password
Waterproof Function	Yes
Attendance Function	Yes
External Doorbell	Built-in doorbell
Dimension	166*86*26mm